

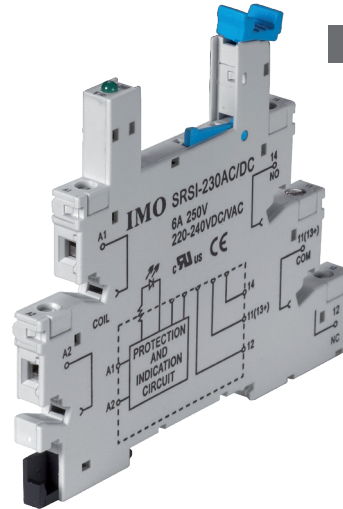
SRSI Relay Sockets

For ETS & ETE Slimline Relays



Key Features

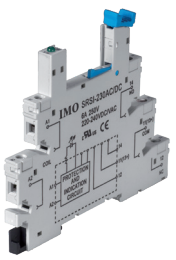
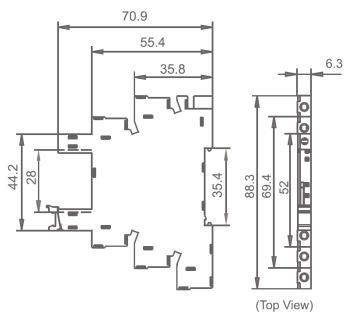


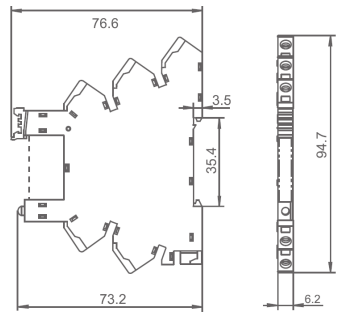

- For use with ETS & ETE Slimline Relays
- Dielectric strength can reach 5000VAC
- Insulation resistance = 1000MΩ
- Built-in protection circuit can indicate the power status, protect the circuit and expand the range of relay input voltage
- Ensures secure retention and easy ejection of relays
- Range of available accessories
- RoHS compliant



Characteristics

Product	Nominal Voltage	Nominal Current	Ambient Temperature	Input Voltage	Relay's Applicable Rated Voltage	Polarity of Input Voltage	Screw Torque (Nm)	Wire Strip Length
SRSI-24AC/DC	250VAC	6A	-40°C to 70°C	12 to 24VAC/DC	12 to 24VDC	No Requirement	0.5	7mm
SRSI-60AC/DC	250VAC	6A	-40°C to 70°C	48 to 60VAC/DC	48 to 60VDC	No Requirement	0.5	7mm
SRSI-110AC/DC	250VAC	6A	-40°C to 55°C	110 to 125VAC/DC	60VDC	No Requirement	0.5	7mm
SRSI-230AC/DC	250VAC	6A	-40°C to 70°C	220 to 240VAC/DC	60VDC	No Requirement	0.5	7mm
SRSI-24DC	250VAC	6A	-40°C to 55°C	6 to 24DC	6 to 24VDC	Requirement	0.5	7mm
SRSC-24AC/DC	250VAC	6A	-40°C to 70°C	12 to 24VAC/DC	12 to 24VDC	No Requirement	-	7mm
SRSC-60AC/DC	250VAC	6A	-40°C to 70°C	48 to 60VAC/DC	48 to 60VDC	No Requirement	-	7mm
SRSC-110AC/DC	250VAC	6A	-40°C to 55°C	110 to 125VAC/DC	110 to 125VDC	No Requirement	-	7mm
SRSC-230AC/DC	250VAC	6A	-40°C to 70°C	220 to 240VAC/DC	220 to 240VDC	No Requirement	-	7mm
SRSC-24DC	250VAC	6A	-40°C to 55°C	6 to 24DC	6 to 24DC	Requirement	-	7mm

Outline Dimensions & Wiring (mm)

Socket	Outline Dimensions	Wiring Diagram
 <p>SRSI Screw Terminal DIN Rail Mounting</p>	 <p>(Top View)</p>	
 <p>SRSC Spring-Loaded Terminal DIN Rail Mounting</p>		

Accessories

