



### Connector Pin Out



Pin	Description	6-wire cable
1	24V voltage supply	brown
2	Analog setpoint input	white
3	Supply ground	blue
	Analog ground*	yellow
4	Analog output (feedback)	black
5	Digital output (pressure switch)	grey
Body	EMC shield	shield

\* A 6-wire cable with separate analog ground is used for cable lengths over 2m to set off the voltage drop for the setpoint.

### Accessories

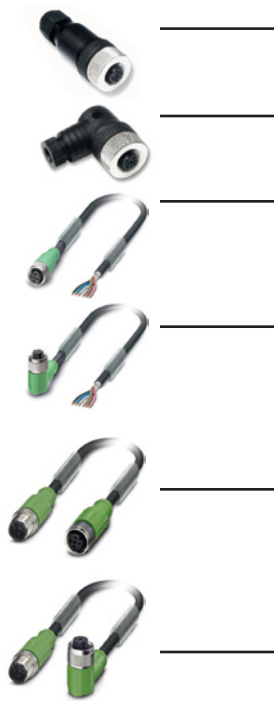

5 Pin 12mm FEMALE Straight Field Attachable Connectors		Model Number
PG 9 Cable Gland		TC05F20000000000
5 Pin 12mm FEMALE 90 DEGREE Field Attachable Connectors		Model Number
PG 9 Cable Gland		TD05F20000000000
Micro Female 5 Pole Straight 6 Wire 24 AWG, Shielded		
3 Meter		TC0503MMS000671Y
5 Meter		TC0505MMS000671Y
Micro Female 5 Pole 90 Degree 6 Wire 24 AWG Euro Color Code, Shielded		
3 Meter		TD0503MMS000671Y
5 Meter		TD0505MMS000671Y
Micro F/M 4 Pole Straight 22 AWG Euro Color Code		
Unshielded		Shielded
2 Meter - TC0403MIETA04000		3 Meter - TC0403MMETA04000
5 Meter - TC0405MIETA04000		5 Meter - TC0405MMETA04000
Micro F 90°/M Straight 22 AWG Euro Color Code		
Unshielded		Shielded
2 Meter - TD0403MIETA04000		3 Meter - TD0403MMETA04000
5 Meter - TD0405MIETA04000		5 Meter - TD0405MMETA04000
PC Software & Cable Connectors		Model Number
DaS Light: Data Acquisition Software for Sentronic <sup>D</sup> - basic parameters - free download at asco.com		99100110
DaS Expert: Data Acquisition Software for Sentronic <sup>D</sup> - full parameters		Consult Factory
RS 232 cable converter; 2m cable with 9-pin Sub-D (plug connector)		88100732