


SAK Series
ASK1EN/SMT 10-60VUC BFI H-

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Product image

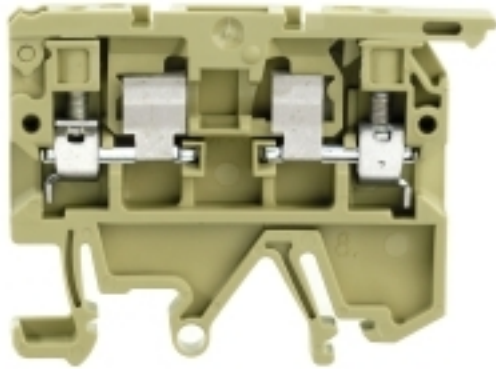

Similar to illustration

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Available until	2016-01-01
Type	ASK1EN/SMT 10-60VUC BFI H-
Order No.	0222760001
Version	SAK Series, Fuse terminal, Rated cross-section: 4 mm ² , Screw connection
GTIN (EAN)	4032248730926
Qty.	100 pc(s).
Alternative product	1119840000

Data sheet

**SAK Series
ASK1EN/SMT 10-60VUC BFI H-**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Width	8.1 mm	Width (inches)	0.319 inch
Height	58 mm	Height (inches)	2.283 inch
Depth	43 mm	Depth (inches)	1.693 inch
Net weight	13.63 g		

Temperatures

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	100 °C
----------------------------------	--------	----------------------------------	--------

Material data

Material	PA 66	UL 94 flammability rating	V-2
----------	-------	---------------------------	-----

System specifications

Version	Screw connection, Fuse cartridge, One end without connector	Number of levels	1
No. of clamping points per level	2	Levels cross-connected internally	No
PE connection	No	Mounting rail	TS 35, TS 32

Additional technical data

Type of mounting	Snap-on
------------------	---------

Conductors for clamping (rated connection)

Number of connections	2	Type of connection	Screw connection
-----------------------	---	--------------------	------------------

Rating data

Rated cross-section	4 mm ²	Rated voltage	60 V
Volume resistance according to IEC 60947-7-x	1 mΩ		

Classifications

ETIM 3.0	EC000899	ETIM 4.0	EC000899
ETIM 5.0	EC000899	ETIM 6.0	EC000899
eClass 6.2	27-14-11-16	eClass 7.1	27-14-11-16
eClass 8.1	27-14-11-16	eClass 9.0	27-14-11-16
eClass 9.1	27-14-11-16		

Approvals

Approvals	
-----------	---

ROHS	Conform
------	---------

Safety note

Safety notice	Safety Information
---------------	------------------------------------