

## PICOPAK-CI-CO-LP-S

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

### Product image



#### PicoPak: the robust one

- Space-saving in the control cabinet thanks to the slim 6 mm width
- Passive isolator, loop-powered at the input and output
- Increased operating temperature range: -40°C ...+70°C
- Zero and Span adjustment possible

#### General ordering data

Version	Signal converter/insulator, Output current loop powered, Input : 4-20 mA, Output : 4-20 mA
Order No.	<a href="#">2517450000</a>
Type	PICOPAK-CI-CO-LP-S
GTIN (EAN)	4050118529975
Qty.	1 pc(s).

Creation date April 20, 2022 11:11:29 AM CEST

Catalogue status 08.04.2022 / We reserve the right to make technical changes.

## PICOPAK-CI-CO-LP-S

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	55 mm	Depth (inches)	2.165 inch
Height	79.4 mm	Height (inches)	3.126 inch
Width	6.1 mm	Width (inches)	0.24 inch
Net weight	44 g		

### Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
Humidity	0...95 % (no condensation)		

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

### Input

Input current	4...20 mA @ 6...35 V DC	Number of inputs	1
Sensor	Current source	Voltage drop, current input	≤3,5 V

### Output

Cut-off frequency (-3 dB)	≥3,5 kHz	Load impedance current	≤ 600 Ω
Number of outputs	1	Output current	4...20 mA, loop-powered
Supply voltage (output)	18...32 V		

### General data

Accuracy	< 0.1 % of measuring range	Configuration	Potentiometer
Galvanic isolation	2-way isolator	Long-term drift	≤±0.05% of the measurement range / year
Power consumption, max.	0.85 W	Power consumption, typ.	0.55 W
Rail	TS 35	Standard	EN 61010-1, EN 61326-1, UL 61010-1:2012, 3rd Edition
Step response time	≤ 5 ms	Temperature coefficient	≤ 200 ppm/K
Type of connection	Screw connection	Voltage supply	Output loop powered

### Insulation coordination

EMC standards	EN 61326-1	Galvanic isolation	2-way isolator
Insulation voltage	3.5 kV	Pollution severity	2
Rated voltage	300 V AC <sub>rms</sub>	Standard	EN 61010-1, EN 61326-1, UL 61010-1:2012, 3rd Edition
Surge voltage category	II		

### Connection data

Type of connection	Screw connection	Tightening torque, max.	0.6 Nm
Wire connection cross section, finely stranded, min.	0.5 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section, finely stranded, min. (AWG)	AWG 20	Wire cross-section, finely stranded, max. (AWG)	AWG 12

Creation date April 20, 2022 11:11:29 AM CEST

Catalogue status 08.04.2022 / We reserve the right to make technical changes.

**PICOPAK-CI-CO-LP-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data****Classifications**

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ECLASS 9.0	27-21-01-20
ECLASS 9.1	27-21-01-90	ECLASS 10.0	27-21-01-20
ECLASS 11.0	27-21-01-20		

**Important note**

Product information	The passive Isolator PicoPak-CI-CO-LP separates stand- analogue current signals. An analogue input current signal is converted linear and galvanic isolated into an analogue out- put current signal. The power supply occurs through the input and output measuring circuit. The measuring range can be adjusted if necessary via the potentiometers (Zero and Span) installed on the front.
---------------------	---

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E141197

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">UL approval</a> <a href="#">UL approval hazardous location</a> <a href="#">IECEx approval</a> <a href="#">ATEX approval</a> <a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>


**PICOPAK-CI-CO-LP-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Drawings**

**Dimensional drawing**

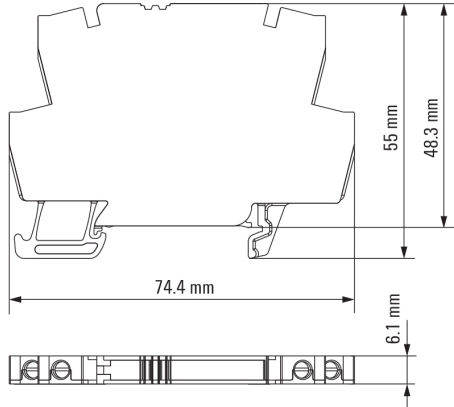

**Connection diagram**

