

## Diode module, with protective coating - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail diode module 12-24 V DC/2x20 A or 1x40 A. Uniform redundancy up to the consumer.

### Why buy this product

- Flexible
- Rugged design
- Consistent redundancy up to the load



### Key commercial data

Packing unit	1 pc
GTIN	 4 046356 524766
Weight per Piece (excluding packing)	750.0 g
Custom tariff number	85049091
Country of origin	China

### Technical data

#### Dimensions

Width	50 mm
Height	130 mm
Depth	125 mm

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C (> 60 °C derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)

#### Input data

# Diode module, with protective coating - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

## Technical data

### Input data

Nominal input voltage range	12 V DC ... 24 V DC
	10 V DC ... 30 V DC
Nominal input current $I_N$	2x 20 A (-25 °C ... 60 °C)
	1x 40 A (-25 °C ... 60 °C)
Maximum current $I_{max}$	2x 30 A (-25°C ... 40°C)
	1x 60 A (-25°C ... 40°C)
Nominal input current $I_N$	2x 20 A (-25 °C ... 60 °C)
	1x 40 A (-25 °C ... 60 °C)
Maximum current $I_{max}$	2x 30 A (-25°C ... 40°C)
	1x 60 A (-25°C ... 40°C)

### Output data

Output current	40 A (Increasing power)
	20 A (Redundancy)
Derating	60 °C ... 70 °C (2.5%/K)
Power loss nominal load max.	10 W ( $I_{OUT} = 20 A$ )

### General

Net weight	0.75 kg
Efficiency	> 97 %
	> 97 %
Protection class	III
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	Alignable: 5 mm horizontally, 15 mm next to active components, 50 mm vertically
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Low Voltage Directive	Conformance with Low Voltage Directive 2006/95/EC
ATEX	# II 3G Ex nA IIC T4 Gc
	KEMA 10 ATEX 0165X
IECEX	Ex nA IIC T4 Gc
	IECEX KEM 10.0091
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
Standard – Safety extra-low voltage	IEC 60950-1 (SELV) and EN 60204 (PELV)
Standard - Safe isolation	DIN VDE 0100-410
	DIN VDE 0106-1010
Standard – Protection against electric shock	DIN 57100-410
Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment	DIN VDE 0106-101
UL approvals	UL/C-UL listed UL 508

# Diode module, with protective coating - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

## Technical data

### General

	UL/C-UL Recognized UL 60950
	UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location)

### Connection data, input

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	6 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	4 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	12
Conductor cross section AWG/kcmil max	10
Stripping length	7 mm
Screw thread	M3

### Connection data, output

Connection method	Screw connection
Conductor cross section solid min.	0.5 mm <sup>2</sup>
Conductor cross section solid max.	16 mm <sup>2</sup>
Conductor cross section stranded min.	0.5 mm <sup>2</sup>
Conductor cross section stranded max.	16 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	10
Conductor cross section AWG/kcmil max	6
Stripping length	10 mm

## Classifications

### eCl@ss

eCl@ss 4.0	27250311
eCl@ss 4.1	27250311
eCl@ss 5.0	27242213
eCl@ss 5.1	27242213
eCl@ss 6.0	27049005
eCl@ss 7.0	27049005
eCl@ss 8.0	27049005

### ETIM

ETIM 4.0	EC002540
ETIM 5.0	EC002540

# Diode module, with protective coating - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

## Classifications

### UNSPSC

UNSPSC 6.01	30211502
UNSPSC 7.0901	39121004
UNSPSC 11	39121004
UNSPSC 12.01	39121004
UNSPSC 13.2	39121004

## Approvals

### Approvals

#### Approvals

UL Recognized / UL Listed / cUL Recognized / cUL Listed / RINA / GL / BV / NK / LR / DNV / ABS / cULus Recognized / cULus Listed

#### Ex Approvals

IECEx / ATEX / UL Listed / cUL Listed / cULus Listed

#### Approvals submitted

### Approval details

UL Recognized

UL Listed

cUL Recognized

cUL Listed

RINA

# Diode module, with protective coating - QUINT-DIODE/12-24DC/2X20/1X40 - 2320157

## Approvals

GL

BV

NK	
mm <sup>2</sup> /AWG/kcmil	10
Nominal current I <sub>N</sub>	63 A
Nominal voltage U <sub>N</sub>	500 V

LR	
mm <sup>2</sup> /AWG/kcmil	6
Nominal current I <sub>N</sub>	41 A
Nominal voltage U <sub>N</sub>	500 V

DNV


ABS

cULus Recognized

cULus Listed

## Drawings

Block diagram

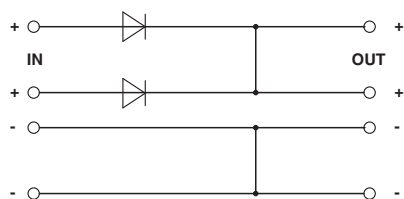

Block diagram

