

Blizzard 50 H 40W 100-240V

DIN rail mount PTC heating element

(natural convection)

- Features:
- Effectivel natural convection heating
 - Compact and powerful design
 - Self regulating, highest power at low ambient
 - Finger-guard (Ryton PPS) with integrated terminal block
 - Stainless steel 35mm DIN rail clip
 - UL approved components pending full approval.



| Specifications: | |
|-------------------------|----------------------------------------------|
| Marking (on element) | ΩDBK HPG 1/22 60X40 100-240V II date code |
| Power Output (10°C) | 40W |
| Voltage (VAC) | 100 - 240 VAC |
| Ir | ≤2.0A |
| Dimensions L mm [in] | 97.5mm [3.84"] |
| Protection Type | IP20 |
| Terminal Block | UL94V-0 12-24AWG |

DBK sample reference number: VS06709



Application Notes:

- Optimised for Low Inrush Current
- UL94V-0 heater guard, does not exceed 105°C (221°F)
- For optimum performance mount vertically
- Other voltage / power output options upon request

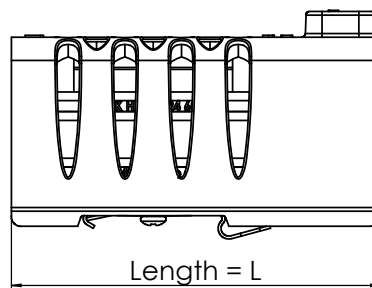

1010/200612

