

Synergy® Sleek Design

double pole switches



8320 10



8322 16



8324 12



8324 23

Sleek design




BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L


PSS: Plates made of Stainless Steel + rust resistance

G: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos.	Double pole switches 20 A - 250 V~
		Conform to BS EN 60669-1 Flush mounting back box : min. 35 mm deep Supplied with 1 gang side extension (3 mm thick) Cat. No. 8321 98 in case of extra wiring space needed Nominal plate dimensions : 86 x 86 mm
		Double pole switch
1	8320 10	 ● Brushed stainless steel
1	8322 10	● Polished stainless steel
1	8324 10	● Gold
		Double pole switch + cord outlet
1	8320 16	 ● Brushed stainless steel
1	8322 16	● Polished stainless steel
1	8324 16	● Gold
		Double pole switch + blue LED power indicator
1	8320 12	 ● Brushed stainless steel
1	8322 12	● Polished stainless steel
1	8324 12	● Gold

Pack	Cat.Nos.	Double pole switches 45 A - 250 V~
		Conform to BS EN 60669-1 Flush mounting back box : min. 47 mm deep Red rocker Nominal plate dimensions : 86 x 86 mm
		Double pole switch + blue LED power indicator
1	8320 23	 ● Brushed stainless steel
1	8322 23	● Polished stainless steel
1	8324 23	● Gold

Synergy® Sleek Design

cooker control units, fused connection units and cable outlets



8320 32

8322 37

8324 19

Sleek design

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

G: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos.	Cooker control units - 250 V~
1	8320 29	Conform to BS 4177 : 1992 Flush mounting back box : min. 47 mm deep Nominal plate dimensions : 86 x 146 mm 45 A Double pole switch + 13 A DP switched socket outlet - with blue LED power indicator
1	8322 29	● Brushed stainless steel
1	8324 29	● Polished stainless steel ● Gold



		Fused connection units unswitched 13 A - 250 V~
		Conform to BS 1363 : Part. 4 Front cable outlet with cord grip. Fuses supplied Locked captive fuse carrier (padlockable) Flush mounting back box : min. 35 mm deep Supplied with 1 gang side extension Cat. No. 8321 98 (3 mm thick) in case of extra wiring space needed Nominal plate dimensions : 86 x 86 mm
1	8320 32	Unswitched - with cord outlet
1	8322 32	● Brushed stainless steel
1	8324 32	● Polished stainless steel ● Gold



		Fused connection units switched 13 A - 250 V~
		Conform to BS 1363 : Part. 4 Front cable outlet with cord grip. Fuses supplied Locked captive fuse carrier (padlockable) Flush mounting back box : min. 35 mm deep Supplied with 1 gang side extension Cat. No. 8321 98 (3 mm thick) in case of extra wiring space needed Nominal plate dimensions : 86 x 86 mm
1	8320 35	Double pole switched - without cord outlet
1	8322 35	● Brushed stainless steel
1	8324 35	● Polished stainless steel ● Gold
1	8320 37	Double pole switched - with blue LED power indicator + cord outlet
1	8322 37	● Brushed stainless steel
1	8324 37	● Polished stainless steel ● Gold



		Cable outlets
		Conform to BS 5733 Fitted with clamp and outlet membrane With terminal block Nominal plate dimensions : 86 x 86 mm
1	8320 19	20 A - 250 V~
1	8322 19	● Brushed stainless steel
1	8324 19	● Polished stainless steel ● Gold
1	8320 26	45 A - 250 V~
		● Anthracite grey colour (plastic)



Synergy® Sleek Design

hotel equipment



8320 90

8323 00

8325 01

Sleek design

BSS: Plates made of austenitic Stainless Steel - non-magnetic - grade 304 L

PSS: Plates made of Stainless Steel + rust resistance

G: Plates made of Stainless Steel + rust resistance

Terminal screws captive and backed off ready for cabling - large angled terminal entries

Compact mechanism for maximum wiring space

Pack	Cat.Nos.	Shaver sockets
1	8320 90	Conform to BS EN 61558-2-5 Suitable for use with European, British, American and Australian 2 pin plugs. Rating: 20 VA. IP 24 Screwless live and neutral terminals Flush mounting back box : min. 45 mm deep Supplied with 2 gang side extension Cat. No. 8321 99 (3 mm thick) in case of extra wiring space needed Nominal plate dimensions : 146 x 86 mm
1	8322 90	230 V / 120 V - 50/60 Hz
1	8324 90	● Brushed stainless steel ● Polished stainless steel ● Gold



		Key card switch 230 V
		For energising a circuit by inserting a key fob or a smart card (access card for a hotel room) Example of use : hotel room power supply only when guest is present Time delay of approx. 30 sec. after card removal To be equipped with a single pole latching relay or contactor
1	8321 00	● Brushed stainless steel
1	8323 00	● Polished stainless steel
1	8325 00	● Gold



		Hotel call indicator DND/Please clean
		Indicator for corridor Indicator lamp and bell push Installed in the corridor, displays calls
1	8321 01	● Brushed stainless steel
1	8323 01	● Polished stainless steel
1	8325 01	● Gold




		Hotel call indicator - internal room control
		Internal control unit Allows the user to select the desired setting Supplied with LED
1	8321 02	● Brushed stainless steel
1	8323 02	● Polished stainless steel
1	8325 02	● Gold



Download the full file at

<http://assets.kempstoncontrols.com/doc/Synergy%20Wiring%20Accessories.pdf>

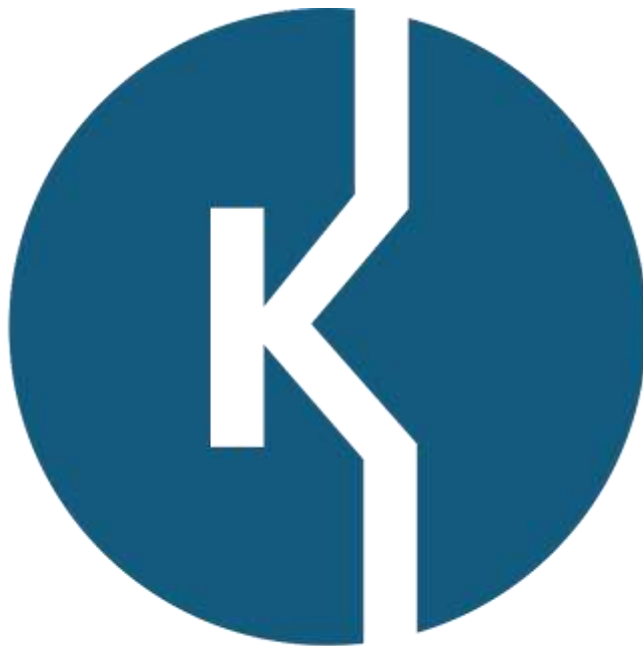

KEMPSTON
CONTROLS