




203680
AV4-UND/ODER
Connection distributor

- Integrated switching function with quadruple AND/OR logic
- 4 sensor inputs, M8/3-pin
- 1 output, M12/8-pin
- 4 LEDs for switching status display
- Robust housing
- High protection type IP 67

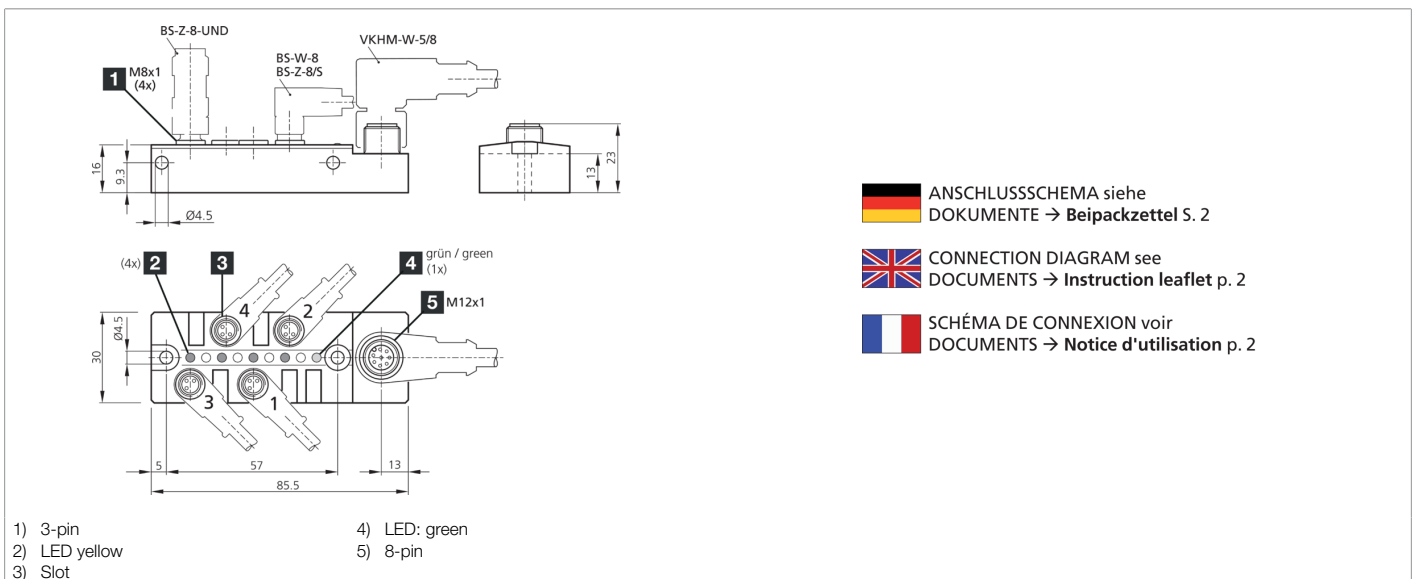

Function											

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	300 mA (per logical contact)
Service voltage	10 ... 30 V DC
Housing material	Plastic (Viton)
Protection class	III, operation on protective low voltage
Operating principle	AND/OR
Switching output	pnp (4x), pnp-OR 1x, pnp-AND 1x
Display	LED Green - Operating display, yellow - Switching status
Ambient temperature during operation	-30 ... +80 °C
Protection type	IP 67 (at tightening torque 0.4 Nm)
Connection	Connector, M12 x 1, 8-pin
Connection 2	Socket, M8, 3-pin (4x)

More information / accessories <https://www.di-soric.com/203680>