


**Accessories**  
**SSCH 10X3X1000 CU/SN**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

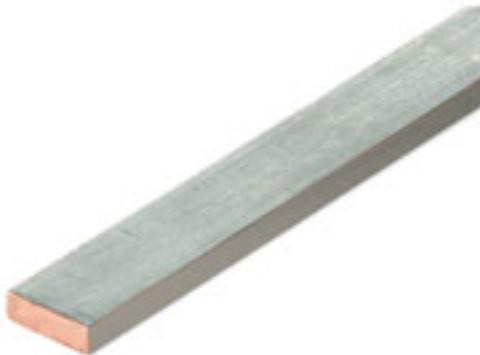

In the switching facilities and controllers, the N conductor may need to be merged with the PE conductor at a central point. For this reason, busbars are available that allow a wide range of cables to be connected within a confined space (up to 70 wires on one metre of rail). The cables are connected via a compression piece or a clamping yoke. For the first variant there is no need to bend the lugs. A guide lug at the compression piece grips into the busbar and holds tightly to the compression piece. The clamping yokes can be moved on the busbar and adjusted to the whole wiring in the facility. The busbar can be used without holes in various lengths. The rail holding clamp SH is used for fastening. On longer rails, it can also be aligned between clamping yokes.

**General ordering data**

Order No.	<a href="#">0348900000</a>
Type	SSCH 10X3X1000 CU/SN
Version	Accessories, Busbar, Copper, 1000 mm
GTIN (EAN)	4008190024802
Qty.	1 m

## Accessories

### SSCH 10X3X1000 CU/SN

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Length	1,000 mm	Width	10 mm
Height	3 mm	Net weight	267 g

### Temperatures

Operating temperature	Storage temperature
-----------------------	---------------------

### Additional technical data

Installation advice	Version	15 x 6 mm busbar connection
Direct mounting		

### Rated data

Rated current	140 A
---------------	-------

### Material data

Surface finish	galvanized	Material	Copper
Colour	Silver		

### System specifications

Product family	Accessories
----------------	-------------

### Classifications

ETIM 2.0	EC000485	ETIM 3.0	EC000485
UNSPSC	30-21-18-01	eClass 4.1	27-14-06-04
eClass 5.1	27-14-06-04	eClass 6.2	27-14-92-14
eClass 7.1	27-14-92-14		

### Approvals

Approvals	
ROHS	Conform