


Fieldbus cables for fieldbus systems
According to IEC61158-2
CABLE FBY-BU/SD-1000M

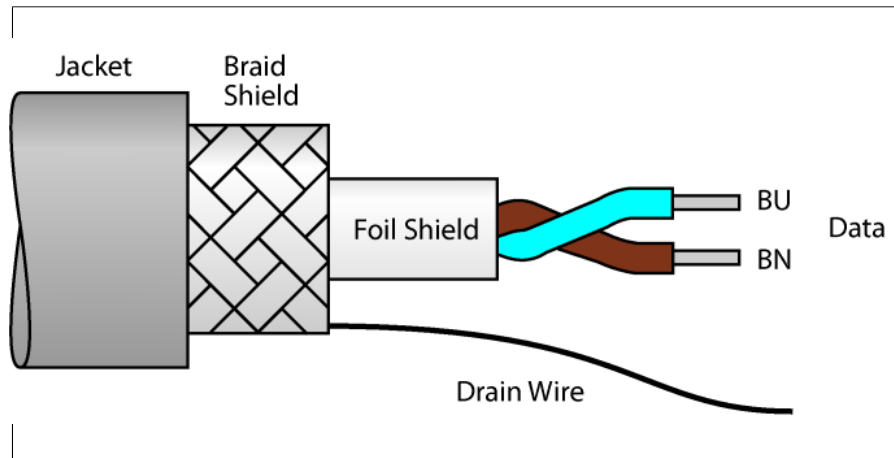

- Fieldbus cable, type A, acc.to IEC 61158-2
- PVC outer jacket, blue
- Resistant to oil, gas and sunlight
- For use in areas exposed to explosion hazards classified as zone 1 and zone 2, group II, acc. to IEC 60079-14
- For indoor and outdoor installation, on racks, on trays and in conduits
- Temperature range -40...+75 °C
- Cable cross section: 18/7 AWG (0.8 mm²)
- Cable length: 1000 m

Type designation	CABLE FBY-BU/SD-1000M
Ident no.	6611108
Cable	18/7 AWG (0.8 mm ²), stranded plain copper, 8
Cable length	1000
Cable jacket	PVC, Blue
Shielding	Plastic-covered aluminum foil, metal side outside, makes contact with drain wire and tinned copper wire
Conductor insulation	PE-foam with PE-casing
Conductor colors	BN, BU
Core cross-section	2x0.8
DC resistance (loop)	43.6 Ω/km
Shield resistance	Nom. 9 Ω /km
Nom. impedance	100 ± 20 (31.25 kBit/s) Ω
Working capacitance	Nom. 60 nF/km
Capacitive earthing	max. 2 nF/km
Damping	max. 3.0 dB/km (with f = 39 kHz)
skew	max. 1.7 μs/km (7.9 kHz -39 kHz)
Nom. Inductance	0.7 mH/km
Rated voltage	300 V
Ambient temperature	
Stationary	-40...+75°C
In motion	-5...+50°C
Approvals	UL
UV resistance	gem. UL 1581, section 1200
Oil-resistant	according to ICEA S82-552
Flame-retardant	according to IEC 60332-3

Cable Cross-section

