

BD01-AK02M0/F TAP-OFF UNIT

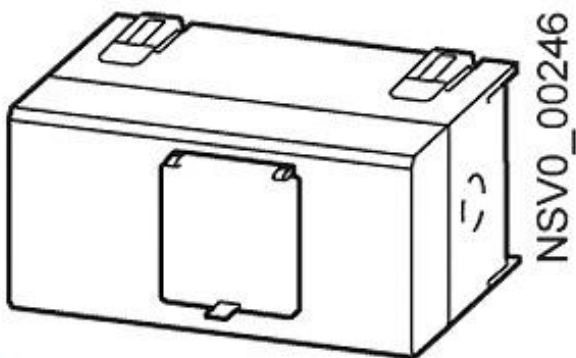


Figure similar

Model	
Product designation	tap-off unit for BD01 busbar trunking system
Operating voltage / at AC	
<ul style="list-style-type: none"> at 50 Hz / rated value / maximum 	400 V
<ul style="list-style-type: none"> at 60 Hz / rated value / maximum 	400 V
Protection class	
Protection class IP	IP54
Dissipation	
Power loss [V•A] / maximum	13 V•A
Main circuit	
Operating frequency / rated value	
<ul style="list-style-type: none"> minimum 	50 Hz
<ul style="list-style-type: none"> maximum 	60 Hz
Operating current	
<ul style="list-style-type: none"> for circuit 1 / at AC / at 50 Hz / rated value / maximum 	32 A

- for circuit 1 / at AC / at 60 Hz / rated value / maximum

32 A

Connections

Connectable conductor cross-section / in the outgoing unit

- minimum
- maximum

0.75 mm²

16 mm²

Tap-off points

Outgoing unit version

cable entry

Size of the outgoing feeder

02

Number of poles / of the outgoing feeder

5

Mechanical Design

Height

119.5 mm

Width

116 mm

Length

200 mm

Number of width units

3

Product component / Locking mechanism

Yes

Certificates

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:085093>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:085093>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:085093

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>