


LESRK

Class RK1 600Vac, 70 to 600A

Dual-Element, Time-Delay Fuses



Dimensions (inches)

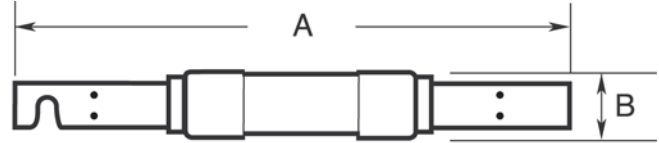

Ampere Ratings	"A"	"B"
70-100	7.88 (± 0.062)	1.11 (± 0.020)
110-200	9.63 (± 0.062)	1.61 (± 0.020)
225-400	11.63 (± 0.094)	2.36 (± 0.020)
450-600	13.38 (± 0.094)	2.88 (± 0.020)

Catalog Symbol: LESRK

Volts: 600Vac (or less)

Amps: 70 to 600A

IR: 200kA RMS Sym. (300kA self certified)
50kAIC

Agency Information: UL Listed – Class R, Guide JDDZ, File E162363, CSA Certified, (200,000 AIR) Class 1422-02, File 700489, Class RK1 per CSA C22.2 No. 248.12

Features

- Current-limitation for maximum short-circuit protection.
- Type 2 protection for IEC and NEMA starters when properly sized.
- High inrush current motor protection.
- Time-delay permits 130% FLA sizing for back-up motor protection against single-phase damage.
- Low watt loss power consumption.
- Electrically isolated end caps.
- 300Vdc (self certified)

Catalog Numbers (amps)

LESRK70	LESRK125	LESRK250	LESRK500
LESRK80	LESRK150	LESRK300	LESRK600
LESRK90	LESRK175	LESRK350	
LESRK100	LESRK200	LESRK400	
LESRK110	LESRK225	LESRK450	

Carton Quantity and Weight

Amps	Carton Quantity	Weight per Carton	
		lbs	kg
70-100	1	2.20	1.0
110-200	1	1.10	0.5
225-400	1	2.36	1.1
450-600	1	3.44	1.5

Class RK1 Fuse Blocks (600V) Catalog Data


Amps	Poles	Catalog Numbers	Terminal Type
100	1	R60100-1CR	Box Lug
	2	R60100-2CR	Box Lug
	3	R60100-3CR	Box Lug
200	1	R60200-1CR	Box Lug
	2	R60200-3CR	Box Lug
400	1	R60400-1CR	Box Lug
	3	R60400-3CR	Box Lug
600	1	R60600-1CR	Box Lug
	3	R60600-3CR	Box Lug

LESRK


Class RK1 600Vac, 70 to 600A

Dual-Element, Time-Delay Fuses

Current Limitation Curves

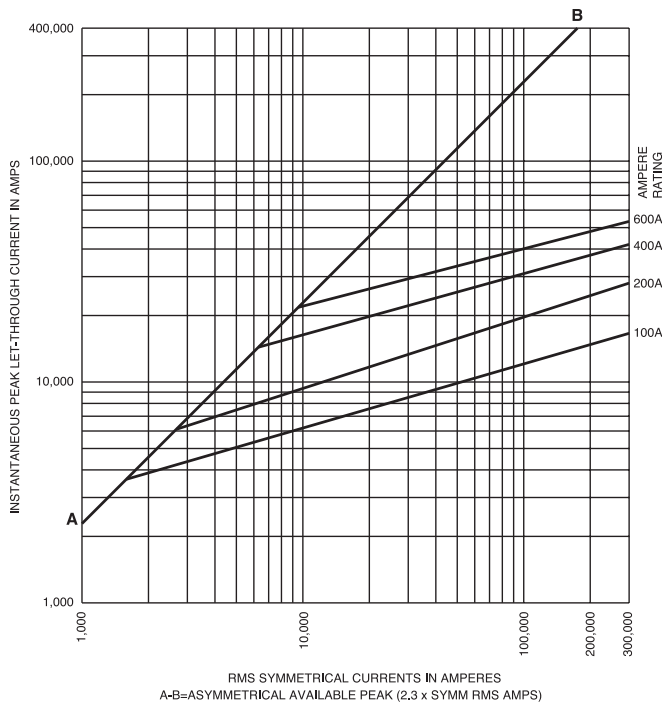

Time-Current Characteristic Curves- Average Melt

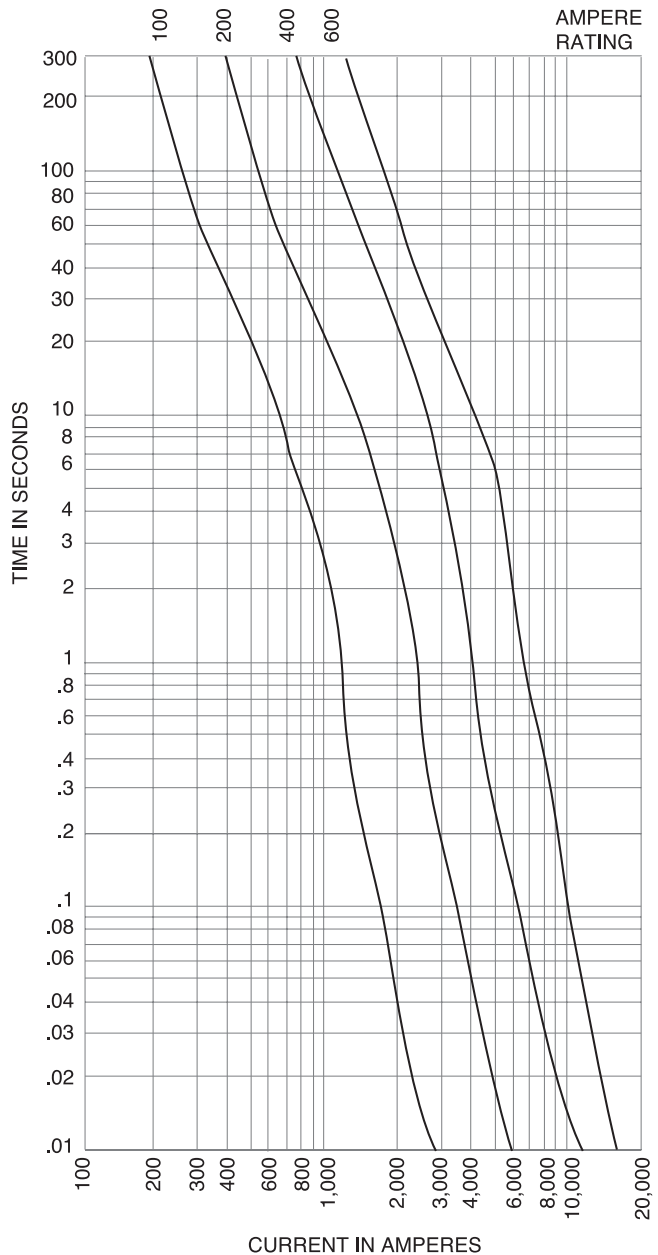

Current-Limiting Effects

LESRK Apparent RMS Sym. Let-Thru Current Vs Fuse Rating

Prosp.

SCC	100A	200A	400A	600A
5000	2200	3250	5000	5000
10,000	2700	4100	7150	9600
15,000	3050	4650	7950	10,650
20,000	3300	5100	8650	11,500
25,000	3500	5500	9200	12,200
30,000	3700	5800	9650	12,750
35,000	3900	6100	10,100	13,300
40,000	4050	6400	10,450	13,750
50,000	4300	6850	11,100	14,600
60,000	4550	7250	11,700	15,300
80,000	4950	7950	12,650	16,450
100,000	5250	8550	13,450	17,450
150,000	5900	9750	15,050	19,400
200,000	6450	10,700	16,300	20,900
250,000	6850	11,500	17,350	22,100
300,000	7250	12,200	18,250	23,200

The only controlled copy of this document is the electronic read-only version maintained by Cooper Bussmann. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.