



Price* : 41.38 GBP



Main

| | |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|---------------------------------------|
| Electrical connection | M12, 4 pins straight female connector |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 20 m |
| Cable outer diameter | 5.2 mm |
| Cable composition | 4 x 0.34 mm ² |
| Wire insulation material | PUR |
| [Ue] rated operational voltage | 250 V AC 300 V DC |
| [In] rated current | 4 A |
| Contact resistance | 5000 µOhm |
| Insulating resistance | 1 GΩ |
| Product weight | 0.115 kg |

Environment

| | |
|---------------------------------------|--|
| IP degree of protection | IP65 IP67 IP69K |
| Product certifications | CULus |
| Ambient air temperature for operation | -40...80 °C (static) -5...80 °C (flexing) |

| | |
|-------------------------------------|-------------|
| Ambient air temperature for storage | -40...80 °C |
|-------------------------------------|-------------|


Offer Sustainability

| | |
|----------------------------------|---|
| Sustainable offer status | Green Premium product |
| RoHS (date code: YYWW) | Compliant - since 0649 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity |
| REACH | Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold |
| Product environmental profile | Available Product environmental |
| Product end of life instructions | Available End of life manual |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|


Dimensions

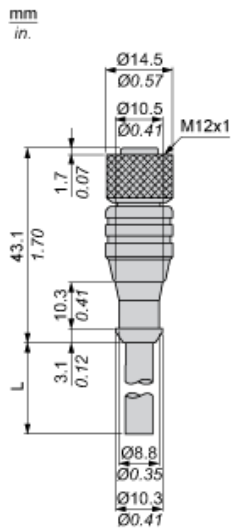

L : Length of cable

Connections and Schemes

Connector



- BN : Brown
- BK : Black
- BU : Blue
- WH : White