


DC - CYLINDRIC
TYP: IBCT1814 / PNP NO



Configuration:	M18
Fitting:	flush
Sensing Distance Sn (mm):	5,0 mm
Connection:	Cable
Nominal Voltage:	24 VDC
Voltage Range:	10-35 VDC
max. Load Current:	300 mA
No-Load Current:	< 10 mA
Voltage Drop:	< 2 V
Switching Frequency:	500 Hz
Hysteresis:	< 15 % (Sr)
Reproduceability:	< 1 % (Sr)
Temperature Drift:	< 10 % (Sr)
Ambient Temperature:	-25 Å°C ... +70 Å°C
Protection Class:	IP 67
Short Circuit- /Inverse Polarity Protection:	yes
Housing Material:	15
LED:	yes
Connection:	2 m PVC/3 x 0,25 mm ²
Material Active Surface:	
EMC:	
Shock/Vibration:	

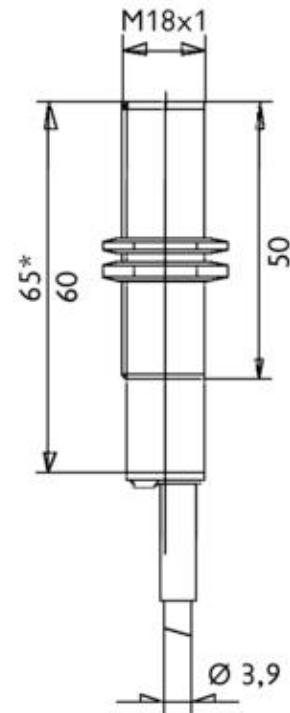

Schönbuch Sensor GmbH & Co KG - Robert-Bosch-Str. 1 - D-71154 Nufringen
Telefon 07032/2010-0 - Fax 07032/2010-49 - info@schoenbuch-sensor.net