


3602 Series

Mechanical Totalizing Counter

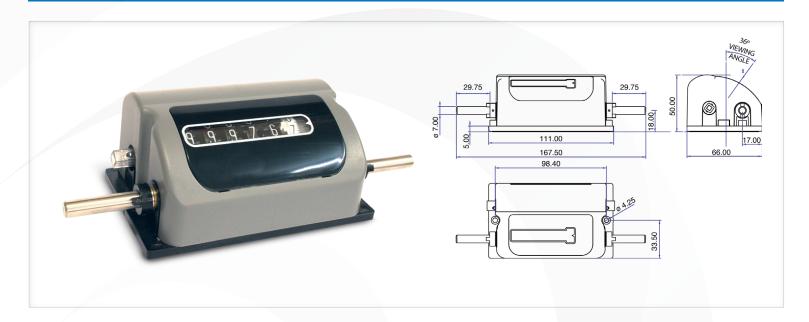

This unit counts revolutions on many different types of production machinery. Robustly constructed for continuous operation at high speeds with the main shaft running in double oil impregnated bearings to ensure accurate, long term, trouble free service. It is supplied with a double drive with wing bush, customer configurable reset.

Key Features

- · 6-digit 6.4mm (0.25in) readout
- Up to 3000 counts per minute with 1:1 gear ratio
- 1:1, 1:10, 2:1, 3:1, 4:1 gearings as standard
- Front viewing
- Reset to zero
- · Reset by lever
- · Customer Configurable Reset

Dimensions

Display White on black, decimals black on white

0.25in (6.4mm) figures

Base Material

Black PC-ABS plastic

Cover Material

Grey ABS plastic

Drive Shaft Diameter 0.275 inch (7mm) diameter

Gearing 1:1, 1:10, 2:1, 3:1, 4:1 as standard.

Others on application

Bearings Bronze, oil impregnated for life
Operating Torque 180g.cm (2.5oz.in) at 1:1 gearing

Maximum Shaft Speed3000 RPMMaximum Count Speed3000 CPM


Operating Temp -10° C to $+50^{\circ}$ C [14° F to 122° F] Storage Temp -20° C to $+50^{\circ}$ C [-4° F to 122° F]

Environmental Protection IP40 **Nett Weight** 200g



Measuring Wheel Ordering Information

Material	Width	12" circumference	18" circumference	1/3m circumference	1/2m circumference	
Rubber Covered Plastic	5/8" (16mm)	007571	007573	007905	007574	
Knurled Aluminum	5/8" (16mm)	001558	001622	-		

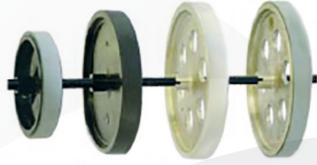

Part Number Ordering Chart

COUNTER TYPE	NUMBER OF DECIMAL PLACES		FIG WHEEL READING		SEAR RATIO		DRIVE DIRECTION	
3602- FRONT VIEWING	0 NO DECIMAL PLACES	0	0 FULL FIGURES (PLAIN)		1:10	TC TOP COMING Material Direction		
	1 ONE DECIMAL PLACE	1	0 - 11" FIG WHEEL (FEET & INCHES)	1	1:1		(Top Coming)	
		2	0 - 9" FIG WHEEL (FEET & TENTHS)	2	2:1			
ALL COUNTERS ARE 6 DIGIT		3	0 - 9" FIG WHEEL (YARDS & TENTHS)	3	3:1			
RESET POSITION IS CUSTOMER SELECTIVE		4	FULL FIGURES (FEET)	4	4:1			
DOUBLE DRIVE SHAFT FITTED AS STANDARD		5	FULL FIGURES (YARDS)	5	1:25	TG	TOP GOING	
EXAMPLE OF CODING: 3602 - 117TG 3602 = FRONT VIEWING 1 = ONE DECIMAL PLACE 1 = 0-11" FIG WHEEL (FEET & INCHES)		6	FULL FIGURES (METRES)	6	10:1		10/ 00/10	
7 = 2:3 TG = TOP GOING	EEL (FEET & INCHES)	7	0 - 7/8" FIG WHEEL (YARDS & EIGTHS)	7	2:3			
3602-117TG = 99999 - 1	2:3 / TOP GOING			8	128:105		Material Direction	
		9	0 - 9cm FIG WHEEL WITH 100 LINES(M/cm)	9	64:105		(Top Going)	



Trumeter (The Americas)
702 S. Military Trail
Deerfield Beach, Florida

FL 33442, USA

Tel: +1 954 725 6699 Email: sales.usa@trumeter.com

Trumeter (Europe)
Pilot Mill Alfred Street Bury, BL9 9EF Tel: +44 161 674 0960 Email: sales.uk@trumeter.com

Innovative Design Technologies Sdn. Bhd Lot 5881, Lorong Iks Bukit Minyak 1 Taman Perindustrian Iks, 14000 Bukit Tengah Penang, Malaysia Web: www.idtworld.com

Tel: + 604 5015700 Email: sales.my@idtworld.com