

## KSK 1/35 G20

**Weidmüller Interface GmbH & Co. KG**


Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

### Product image

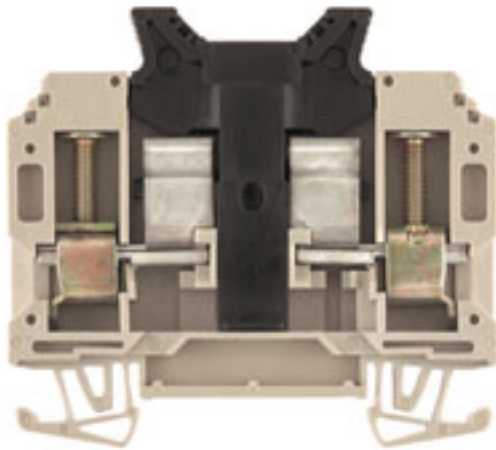

Similar to illustration

### Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

### General ordering data

Version	SAK Series, Fuse terminal, Rated cross-section: 10 mm <sup>2</sup> , Screw connection, TS 35
Order No.	<a href="#">3897820000</a>
Type	KSK 1/35 G20
GTIN (EAN)	4008 190547219
Qty.	20 pc(s).
Delivery status	<b>This article will no longer be available in the future.</b>
Available until	2020-12-31
Alternative product	<a href="#">1011000000</a>

Creation date June 30, 2021 12:21:41 PM CEST

## KSK 1/35 G20

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	63 mm	Depth (inches)	2.48 inch
Height	85.5 mm	Height (inches)	3.366 inch
Width	13 mm	Width (inches)	0.512 inch
Net weight	63.4 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

## Material data

Material	KrG	Colour	medium yellow
UL 94 flammability rating	V-0, 5VA		

## System specifications

Version	Screw connection, Fuse cartridge, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 35	N-function	No
PE function	No	PEN function	No

## Additional technical data

Installation advice	TS 35	Type of mounting	Snap-on
---------------------	-------	------------------	---------

## Conductors for clamping (rated connection)

Clamping range, max.	16 mm <sup>2</sup>	Clamping range, min.	0.5 mm <sup>2</sup>
Clamping screw	M 4	Connection cross-section, stranded, max.	10 mm <sup>2</sup>
Connection cross-section, stranded, min.	0.5 mm <sup>2</sup>	Connection direction	on side
Number of connections	2	Type of connection	Screw connection
Wire connection cross-section, solid core, max.	16 mm <sup>2</sup>	Wire connection cross-section, solid core, min.	0.5 mm <sup>2</sup>

## Fuse terminals

Cartridge fuse	G-Si. 5 x 25
----------------	--------------

## General

Installation advice	TS 35	Rail	TS 35
---------------------	-------	------	-------

## Rating data

Rated cross-section	10 mm <sup>2</sup>	Rated voltage	250 V
Rated current	6.3 A	Volume resistance according to IEC 60947-7-x	0.56 mΩ
Power loss in accordance with IEC 60947-7-x	1.82 W		

Creation date June 30, 2021 12:21:41 PM CEST

Catalogue status 18.06.2021 / We reserve the right to make technical changes.

## KSK 1/35 G20

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

### Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ETIM 8.0	EC000899	ECLASS 9.0	27-14-11-16
ECLASS 9.1	27-14-11-16	ECLASS 10.0	27-14-11-16
ECLASS 11.0	27-14-11-16		

### Approvals

Approvals



ROHS Conform

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">EAC certificate</a> <a href="#">Declaration of Conformity</a> <a href="#">Declaration of Conformity all terminals</a>
Engineering Data	<a href="#">EPLAN, WSCAD</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>