

# Technical Information:

## DED Door Enclosures



### OVERVIEW

Manufactured from flame retardant ABS to UL94-HB, our range of DED Door Enclosures are manufactured to a very high quality which can endure high impact.

Ideal for use in sea salt air conditions and dry dust environments, DED enclosures come complete with everything you need in one kit.

Available in 10 sizes.

### KIT INCLUDES:

- Wall Mounting Brackets with Fixing Screws
- 1 x Key Included as Standard

### FEATURES

IP65 & IK08 RATED

FLAME RETARDANT ABS TO UL94-HB

SUPPLIED IN GREY (RAL 7035) BODY


SOLID GREY (RAL 7035) OR TRANSPARENT DOOR OPTION

TEMPERATURE RANGE OF -20°C TO +85°C

AVAILABLE IN 10 SIZES

### DIMENSIONS

Please see overleaf for specific dimensions. This diagram shows the reference to width, height and depth.

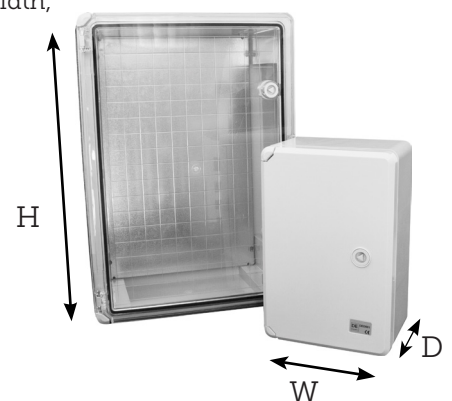

## Blank Door Enclosures

Product Code	IP Rating	Colour	Material	H (mm)	W (mm)	D (mm)	Temp Rating
DED001	65	Grey (RAL 7035)	ABS-HB	300	200	130	-20°C to +85°C
DED002	65	Grey (RAL 7035)	ABS-HB	350	250	150	20°C to +85°C
DED004	65	Grey (RAL 7035)	ABS-HB	400	300	170	20°C to +85°C
DED005	65	Grey (RAL 7035)	ABS-HB	400	300	220	20°C to +85°C
DED006	65	Grey (RAL 7035)	ABS-HB	500	350	190	20°C to +85°C
DED007	65	Grey (RAL 7035)	ABS-HB	500	400	240	20°C to +85°C
DED008	65	Grey (RAL 7035)	ABS-HB	600	400	200	20°C to +85°C
DED010	65	Grey (RAL 7035)	ABS-HB	700	500	250	20°C to +85°C
DED3003	65	Grey (RAL 7035)	ABS-HB	500	400	175	20°C to +85°C
DED3021	65	Grey (RAL 7035)	ABS-HB	800	600	260	20°C to +85°C

## Transparent Door Enclosures

Product Code	IP Rating	Colour	Material	H (mm)	W (mm)	D (mm)	Temp Rating
DED011	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	300	200	130	-20°C to +85°C
DED012	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	350	250	150	-20°C to +85°C
DED014	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	400	300	170	-20°C to +85°C
DED015	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	400	300	220	-20°C to +85°C
DED016	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	500	350	190	-20°C to +85°C
DED017	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	500	400	240	-20°C to +85°C
DED018	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	600	400	200	-20°C to +85°C
DED020	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	700	500	250	-20°C to +85°C
DED3013	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	500	400	175	-20°C to +85°C
DED3022	65	Grey (RAL 7035)	ABS-HB Polycarbonate Door	800	600	260	-20°C to +85°C