

## Flange - PTFIX 1,5-F - 1049503

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Flange, with screw-on fixing, width: 7.7 mm, height: 17.7 mm, color: gray, mounting type: Screw mounting

### Your advantages

- Easy marking options



### Key Commercial Data

Packing unit	30 pc
Minimum order quantity	30 pc
GTIN	 4 0 5 5 6 2 6 6 6 1 0 8 7
GTIN	4055626661087
Weight per Piece (excluding packing)	1.600 g
Custom tariff number	85369010
Country of origin	Poland
Sales Key	BE2269


### Technical data

Product type	Mounting material
Approval	EAC
	CSA
	cUL Recognized

### Drawings

# Flange - PTFIX 1,5-F - 1049503

Dimensional drawing

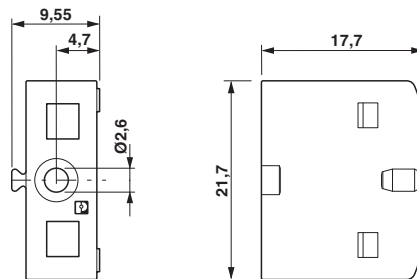

## Classifications

### eCl@ss

eCl@ss 10.0.1	27370419
eCl@ss 11.0	27370419
eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27370400
eCl@ss 6.0	27370400
eCl@ss 7.0	27370419
eCl@ss 9.0	27370419

### ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 6.0	EC001024
ETIM 7.0	EC001024

### UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 18.0	39121708
UNSPSC 19.0	39121708
UNSPSC 20.0	39121708
UNSPSC 21.0	39121708

## Approvals

### Approvals

# Flange - PTFIX 1,5-F - 1049503

## Approvals

Approvals

EAC / CSA / cUL Recognized

Ex Approvals

### Approval details

EAC			RU C- DE.AI30.B.01102
-----	--	--	--------------------------

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	13631
	B	C	D
Nominal voltage UN	300 V	150 V	300 V
Nominal current IN	20 A	20 A	10 A
mm <sup>2</sup> /AWG/kcmil	26-12	26-12	26-12

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
	B	C	D
Nominal voltage UN	300 V	150 V	300 V
Nominal current IN	15 A	15 A	10 A
mm <sup>2</sup> /AWG/kcmil	26-14	26-14	26-14