

ceiling accessories

safety lampholders and pendant sets



Pack	Cat. Nos.	Energy-saving pendant set
1	White 6603 07	<p>Conforms to EN 61000-3-2, EN 50082-1, EN 55015, EN 60929, EN 61547, EN 60928 and BS 67</p> <p>Supply voltage 230 - 240 V Mains frequency 50 Hz To be used with 13/18 W 4 pin plug-in lamps only Lamp fitting type GX24q-1 Dimming is not possible Ceiling rose has angled terminal block with clear polycarbonate shroud 8 in-line terminals with captive screws and earth terminal</p> <p>3 inch drop – energy-saving 13/18 W pendant set Lamp not supplied</p>

Pack	Cat. Nos.	Safety lampholders
20	White 0600 81	<p>T2 rated to BS 7895 Heat resistant glass fibre reinforced PET¹ one-piece lampholder body Safety lampholders feature automatic isolation of brass plungers following lamp removal Plungers cannot be made live again unless lamp is in place</p> <p>B22 lampholder – short skirt</p>

Pack	Cat. Nos.	Safety lampholder + tails
20	White 8204 90	<p>T2 rated to BS 7895</p> <p>Safety lampholder + 6 inch tails</p>

Pack	Cat. Nos.	Safety batten lampholders
10	White 0600 85	<p>T2 rated to BS 7895 Incorporate previous safety lampholders, plus : Angled terminal block with clear polycarbonate shroud Heat resistant tails to IEC 60227</p> <p>B22 lampholder – straight/short skirt 8 in-line terminals with captive screws plus earth</p>
10	0600 86	<p>B22 lampholder – straight/H.O. skirt 8 in-line terminals with captive screws plus earth</p>

Pack	Cat. Nos.	Safety pendant sets
10	White 0600 89	<p>T2 rated to BS 7895 Combination of ceiling rose and previous safety lampholder with length of two core 0.75 mm² PVC circular flexible cable, plus : Angled terminal block with clear polycarbonate shroud 8 in-line terminals with captive screws and Heat resistant tails to IEC 60227</p> <p>6 inch drop – short skirt lampholder</p>
10	0600 90	<p>6 inch drop – H.O. skirt lampholder</p>

1 : PET – Polyethylene Terephthalate

ceiling switches



Pack	Cat. Nos.	Ceiling switches
		Conform to BS EN 60669-1 Clearly embossed terminal markings Thermoplastic material resulting in increased mechanical strength Quick snap on cover mouldings with easily detachable cord for installation/security Dimensions : 80 mm diameter Fixing centres : 50-8 mm
10	0611 10	Mains voltage – white 6 A – 250 V~ SP one way with 1.5 m white cord
10	0611 11	6 A – 250 V~ SP two way with 1.5 m white cord
10	0611 30	16 A – 250 V~ DP one way with 1.5 m white cord
		Extra low voltage (cord not supplied)
10	0611 25	Pull to make/pull to break (non-latching) ¹
10	0611 26	Pull to make/pull to break with 28 V indicator and orange lens (non-latching) ¹

Pack	Cat. Nos.	Ceiling switch 50 A DP - 250 V~
		Conforms to BS 3676 Positive ON/OFF flag indicator Red neon indicator Suitable for ceiling or wall mounting For flush mounting, use box Cat. No. 0891 17 p. 85 Dimensions : 86 x 86 mm Fixing centres : 60-3 mm
10	7545	50 A DP ceiling switch
10	7768	Surface box for Cat. No. 7545 - depth 47 mm

Pack	Cat. Nos.	Accessories
10	0611 49	White replacement cord 1.5 m
10	8204 60	Orange cord 2.3 m and orange acorn
250	8204 69	White adaptor

utility weatherproof


bukhead lighting




Pack	Cat. Nos.	Weatherproof round bulkhead lights
		IP 44 Conform to IS EN 60598-1 B22 lampholder Class II □ (double insulated) White base Multi-purpose low profile bulkhead suitable for indoor or outdoor application Twist and lock closing Lamp not supplied
		100 W incandescent
5	0604 50	With glass diffuser
10	0604 58	With polycarbonate diffuser

Pack	Cat. Nos.	Plexo weatherproof bulkhead lights
		IP 55 - IK 08 B22 lampholder Hinged polycarbonate diffuser Top/bottom reversible opening Lamp not supplied
		75 W incandescent
5	6604 17	With clear diffuser
1	6604 18	With red diffuser

Weatherproof round bulkhead lights

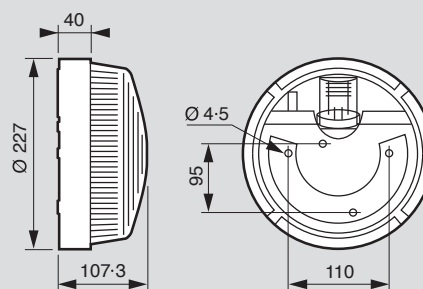

Plexo weatherproof bulkhead lights

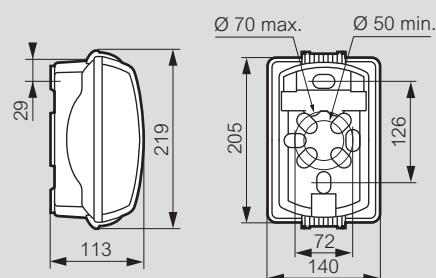

All dimensions in mm (nominal)

1 : Outside the scope of BS EN 60669-1

Download the full file at

<http://assets.kempstoncontrols.com/doc/Wiring%20Accessories%20Product%20Guide.pdf>



KEMPSTON
CONTROLS