


# Viking 3 terminal blocks – screw connection

for copper cable

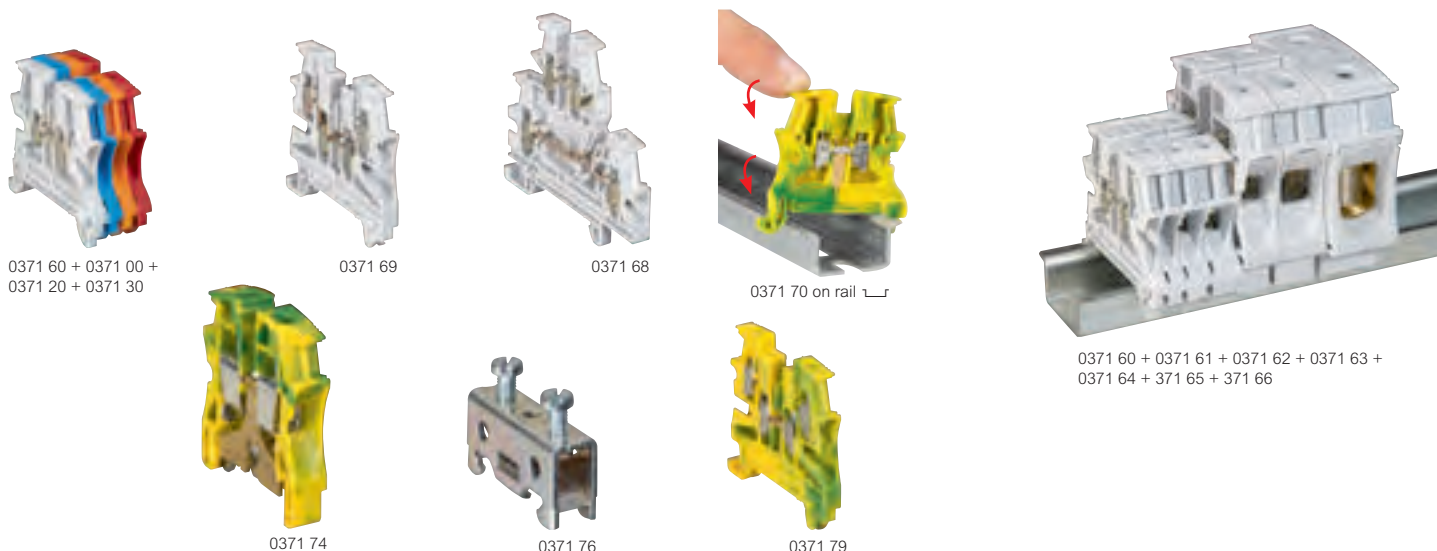

Accessories **p. 126-127**  
 Technical characteristics **p. 128-129**

All V2 polyamide UL94 960 °C to IEC EN 60695-2-11  
 Compatible with either rigid (0.25 mm<sup>2</sup> to 95 mm<sup>2</sup>) or flexible (0.25 mm<sup>2</sup> to 70 mm<sup>2</sup>) copper cables  
 Facility for 2 bridging combs  
 Compatible with rails depth 15 mm and rails EN 60715 depth 7.5 mm and 15 mm  
 Range comprises only 2 block heights (2.5 mm<sup>2</sup> to 10 mm<sup>2</sup> and 16 mm<sup>2</sup> to 70 mm<sup>2</sup>) ensuring a neat installation

Pack	Cat. Nos.	Connection	Capacity			Width (mm)
		Grey for standard circuit Blue for neutral conductor Orange for circuit not broken by the master isolating device Red for special circuits (safety, protected, etc)				
		<b>1 connection - 1 entry/1 exit</b>				
60	0371 60	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5
60	0371 00	Blue ●				
60	0371 20	Orange ●				
60	0371 30	Red ●				
50	0371 61	Grey ●	4	0.25 to 6	0.25 to 4	6
50	0371 01	Blue ●				
50	0371 21	Orange ●				
50	0371 31	Red ●				
40	0371 62	Grey ●	6	0.5 to 10	0.25 to 6	8
40	0371 02	Blue ●				
30	0371 63	Grey ●	10	1.5 to 16	2.5 to 10	10
30	0371 03	Blue ●				
20	0371 64	Grey ●	16	1.5 to 25	4 to 16	12
20	0371 04	Blue ●				
20	0371 65	Grey ●	35	2.5 to 50	4 to 35	15
20	0371 05	Blue ●				
10	0371 66 <sup>1</sup>	Grey ●	70	25 to 95	16 to 70	22
		<b>1 connection - 2 entries/2 exits</b>				
25	0371 69	Grey ●	4	0.25 to 6	0.25 to 4	6
25	0371 09	Blue ●				
		<b>2 connections on 2 levels</b>				
60	0371 67	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5
60	0371 07	Blue ●				
60	0371 68	Grey ●	4	0.25 to 6	0.25 to 4	6
60	0371 08	Blue ●				
		<b>3 connections on 3 levels</b>				
50	0371 51 <sup>2</sup>	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5



Pack	Cat. Nos.	Protection	Capacity			Width (mm)
		<b>1 connection - 1 entry/1 exit - metal base</b> Screwless fixing on rail up to 10 mm width PEN from 10 mm <sup>2</sup>				
60	0371 70	Green/yellow ●	2.5	0.25 to 4	0.25 to 2.5	5
50	0371 71	Green/yellow ●				
40	0371 72	Green/yellow ●				
30	0371 73	Green/yellow ●				
10	0371 74	Green/yellow ●				
10	0371 75	Green/yellow ●				
10	0371 76	-	35	2.5 to 50	4 to 35	15
		<b>1 connection - 2 entries/2 exits - metal base</b> Screwless fixing on rail				
50	0371 79	Green/yellow ●	4	0.25 to 6	0.25 to 4	6
		<b>1 connection - 1 entry/1 exit - plastic base</b> Can be used for protection conductor inside class II equivalent assemblies				
50	0371 77	Green ●	4	0.25 to 6	0.25 to 4	6
40	0371 78	Green ●				
		<b>PNE - Phase/Neutral/Earth</b>				
		<b>3 connections on 3 levels - metal base</b> Green/yellow marking for the lower level Screwless fixing on rail				
50	0371 52 <sup>2</sup>	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5



CAB 3 marking system **p. 140-142**  
 Starfix ferrules and crimping tools **p. 148-149**



1 : Built-in end cap  
 2 : Cable capacity - 2.5 mm<sup>2</sup> max. only when used with bridging comb

# Viking 3 terminal blocks – screw connection

for copper cable (continued)



0371 80 + automotive-type fuse



0371 82 + 0371 83 +  
0371 85



0371 84 + 0371 86



0371 87



0371 51



0371 52

Accessories p. 126-127  
Technical characteristics p. 128-129

All V2 polyamide UL94 960 °C to IEC EN 60695-2-11  
Compatible with either rigid (0.25 mm<sup>2</sup> to 95 mm<sup>2</sup>) or flexible (0.25 mm<sup>2</sup> to 70 mm<sup>2</sup>) copper cables  
Facility for 2 bridging combs  
Compatible with rails depth 15 mm and rails EN 60715 depth 7.5 mm and 15 mm  
Range comprises only 2 block heights (2.5 mm<sup>2</sup> to 10 mm<sup>2</sup> and 16 mm<sup>2</sup> to 70 mm<sup>2</sup>) ensuring a neat installation

Pack	Cat. Nos.	Disconnection				
		<b>1 connection</b>				
		Disconnection by means of blade type lever, handle lever or mini lever (with tool)				
		<b>Open (to be equipped)</b>				
		Can take a blade-type automotive fuse or a miniature circuit breaker				
		Colour	Nominal cross section (mm <sup>2</sup> )	Capacity		Width (mm)
				Rigid cable (mm <sup>2</sup> )	Flexible cable (mm <sup>2</sup> )	
20	0371 80	Grey ●	2.5	0.25 to 2.5	0.25 to 2.5	6
		<b>For fuse cartridge 5 x 20 with handle lever</b>				
20	0371 81	Grey ●	2.5	0.25 to 2.5	0.25 to 2.5	6
		<b>For neutral circuit with blue handle lever</b>				
20	0371 82	Grey/blue ●	2.5	0.25 to 2.5	0.25 to 2.5	6
		<b>For standard circuit with handle lever</b>				
20	0371 83	Grey ●	2.5	0.25 to 2.5	0.25 to 2.5	6
		<b>For standard circuit with mini lever</b>				
20	0371 84	Grey ●	2.5	0.25 to 2.5	0.25 to 2.5	6
		<b>For circuit not broken with handle lever</b>				
		Circuit not broken by the master isolating device				
20	0371 85	Orange ●	2.5	0.25 to 2.5	0.25 to 2.5	6
		<b>For circuit not broken with mini lever</b>				
		Circuit not broken by the master isolating device				
20	0371 86	Orange ●	2.5	0.25 to 2.5	0.25 to 2.5	6
		<b>For cartridge 5 x 20 with screwed plug</b>				
20	0371 87	Grey ●	10	0.25 to 16	0.25 to 10	12

**Blown fuse indicators** p. 127

Pack	Cat. Nos.	Blocks for sensors and actuators				
		For connecting sensors (Cat. No. 0371 51) or actuators (Cat. No. 0371 52), and their shared power supply unit when using equipotential bridging comb				
		Cat. Nos. 0375 46/47 (wiring diagram p. 127)				
		<b>3 connections on 3 levels - for sensor</b>				
		Colour	Nominal cross section (mm <sup>2</sup> )	Capacity		Width (mm)
				Rigid cable (mm <sup>2</sup> )	Flexible cable (mm <sup>2</sup> )	
50	0371 51 <sup>1</sup>	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5
		<b>3 connections on 3 levels - for actuator</b>				
		Green/yellow marking for the lower level				
		Metal base. Screwless fixing on rail				
50	0371 52 <sup>1</sup>	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5



**Accessories** p. 126-127

**End stops** p. 126

CAB 3 marking system p. 140-142  
Starfix ferrules and crimping tools p. 148-149



1 : Rigid cable capacity - 2.5 mm<sup>2</sup> max. only when used with bridging comb

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



**KEMPSTON**  
CONTROLS