

**M12 male 0° B-cod. IDC**3-pol., 0,25 - 0,34mm<sup>2</sup>, 7 - 8,8mm, shielded

Male straight

M12, 3-pole

B-coded

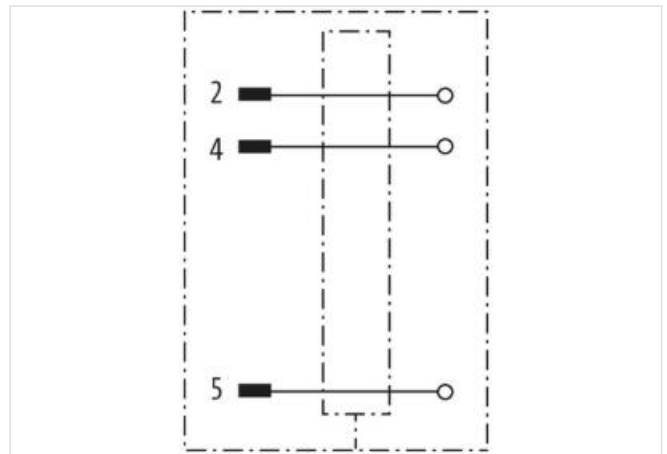
shielded

IDC terminals

Sealing range (cable Ø): 7...8.8 mm

[Link to Product](#)**Illustration**

Product may differ from Image

**Form**

Form 14201

**Technical Data**

Operating voltage	max. 32 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.25...0.34 mm <sup>2</sup> (AWG 22...24)
Sealing range (cable Ø)	7.0...8.8 mm
Protection	IP67 inserted and tightened (EN 60529)
Outer wire Ø	2.0...2.6 mm

**General data**

Temperature range -25...+85 °C

Product article number of manufacturer 7000-14201-0000000