


Grey Narrow Open Slot Trunking

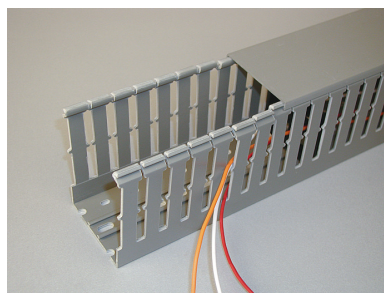

CZE..4 Narrow Slot

Order Code	Dimensions	Pack Qty
	Base x Height (mm)	(metres)
CZE164	25 x 30	80
CZE134	25 x 40	60
CZE84	40 x 40	40
CZE44	60 x 40	24
CZE264	80 x 40	24
CZE74	25 x 60	40
CZE54	40 x 60	36
CZE94	60 x 60	24
CZE64	80 x 60	24
CZE174	100 x 60	20
CZE104	120 x 60	16
CZE144	25 x 80	32
CZE154	40 x 80	24
CZE114	60 x 80	24
CZE124	80 x 80	24
CZE194	100 x 80	16
CZE324	120 x 80	16
CZE344	25 x 100	24
CZE354	40 x 100	16
CZE184	60 x 100	16
CZE364	80 x 100	16
CZE374	100 x 100	16

General Characteristics

Designed for terminal block and Din component applications with higher number of entries into the duct. Lead free.

- Smooth wire entry allows for quick insertion of wires
- Built-in wire retainer - double restricted slots on some sizes
- Smooth fingers will not injure the installer or damage cables
- Staggered mounting hole pattern for use in cabinets which are designed to these standards.
- Double scoreline allows easy removal of wall section or individual fingers by hand without the use of tools
- Non-slip cover with exclusive cover design with maximum grip
- RoHS Certified - Lead Free
- Manufactured in 2m lengths

Technical Characteristics

- Wire ducts with 4mm slots
- Self extinguishing rigid PVC Class 1 (UL94-VO)
- Colour: Grey - RAL7030

Certifications and compliance

- A Norme EN50085-2-3
- CSA
- UR
- RINA
- CE marked

'EDGE' Trunking



CZED110K60


Order Code	Dimensions	Pack Qty
	(mm)	(metres)
CZED110K60	110 x 110 x 60	8

General Characteristics

EDGE angular slotted trunking with 4mm slots for electrical panels. The Edge wire duct is designed to be used on the very corner of the enclosure where the space is normally not utilized. This system allows wires and cables to be routed professionally to the lateral panels.

- One single size, 110 X 110 mm with 60 mm opening
- Colour: Grey - RAL7030
- RoHS Certified - Lead Free
- Manufactured in 2m lengths

Spare Trunking Lid

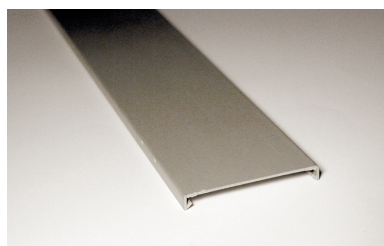

CZGCOP Trunking Lid

Order Code	To suit trunking base width
	(mm)
CZGCOP25	25
CZGCOP40	40
CZGCOP60	60
CZGCOP80	80
CZGCOP100	100
CZGCOP150	150

General Characteristics

Covers for Standard and Narrow Slot Trunking.

- Supplied in 2m lengths
- Colour: Grey - RAL7030
- RoHS Certified - Lead Free

