

Preparation of compressed air ► Maintenance units and components

Distributor, Series AS3-DIS

► G 3/8 - G 1/2 ► Distributor 4x ► suitable for ATEX



00119389

Version
 Mounting orientation
 Working pressure min./max.
 Medium
 Medium temperature min./max.
 Ambient temperature min./max.

Materials:
 Housing
 Front plate
 Seals
 Threaded bushing

Can be assembled into blocks
 Any
 0 bar / 16 bar
 Compressed air
 Neutral gases
 -10°C / +50°C
 -10°C / +50°C

Polyamide
 Acrylonitrile butadiene styrene
 Acrylonitrile butadiene rubber
 Die cast zinc

Technical Remarks

- Suitable for direct mounting of a PE1 and PM1 series pressure sensor (flange version)
- Suitable for use in Ex zones 1, 2, 21, 22


	Port	Qn					Weight	Part No.
		1►2	1►3	1►4	1►5	1►6		
		[l/min]					[kg]	
	G 3/8						0.32	R412007250
	G 1/2	7250	5500	2300	2250	2300		R412007251

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar

Distributor, Series AS3-DIS

▶ G 3/8 - G 1/2 ▶ Distributor 4x ▶ suitable for ATEX

Dimensions

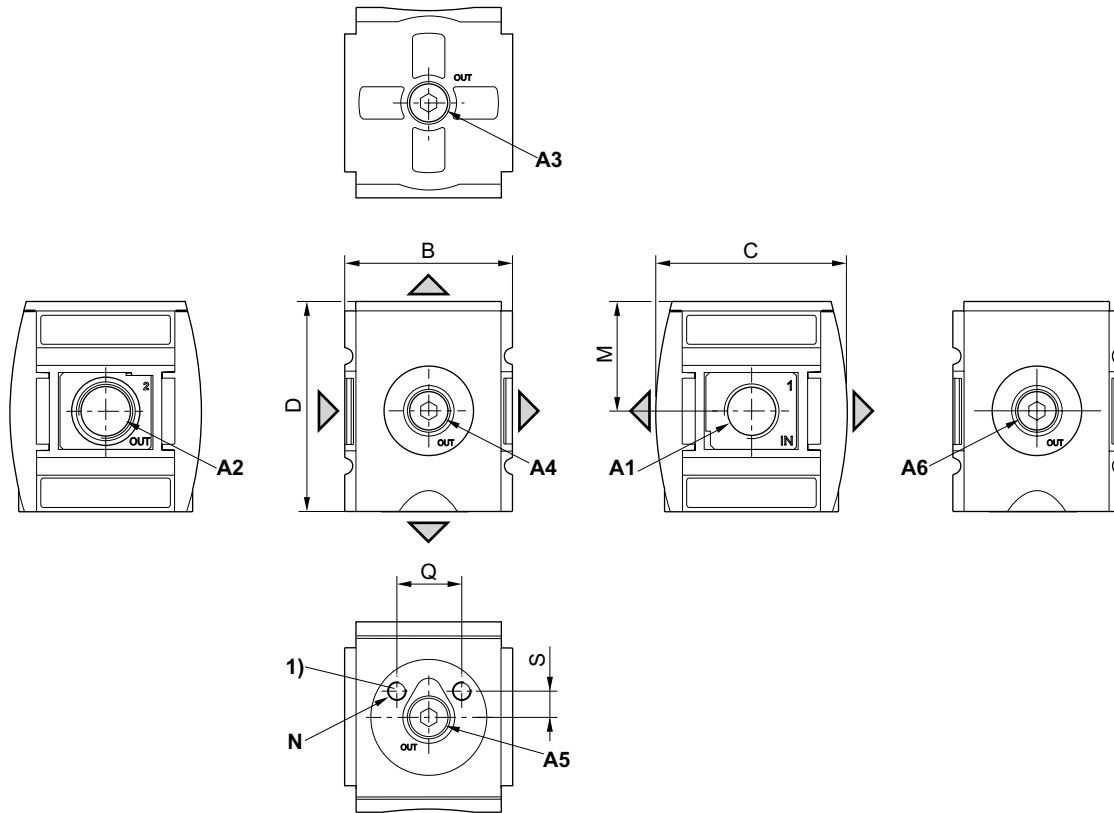

00124429

- A1 = input
 A2 = output
 A3 = output
 A4 = output
 A5 = output
 A6 = output
 1) Mounting thread for pressure sensor

A1	A2	A3	A4	A5	A6	B	C	D	M	N	Q	S
G 3/8	G 3/8	G 1/2	G 3/8	G 1/4	G 3/8	63	74	80.5	42.5	M5	20	8
G 1/2	G 1/2	G 1/2	G 3/8	G 1/4	G 3/8	63	74	80.5	42.5	M5	20	8