## SIEMENS

## Data sheet


## 3NA6801




LV HRC fuse element, NH000, In: 6 A, gG, Un AC: 500 V, Un DC: 250 V, Combined indicator, Insulated grip lugs

Model					
product brand name	SENTRON				
product designation	LV HRC fuse link				
design of the product	With blade contacts				
design of an identification indicator	Combination alarms				
design of the switching contact	Non-corroding, silver-plated				
design of the fuse link	LV HRC fuse link				
General technical data					
size of fuse system according to EN 60269-1	NH000				
operating class of the fuse link	gG				
mounting type	insulated grip lugs				
type of voltage of the operating voltage	AC/DC				
supply voltage					
• at AC rated value	500 V				
• at DC	250 V				
Protection class					
protection class IP	IP20, with connected conductors				
Switching capacity					
switching capacity current					
<ul> <li>at DC according to IEC 60947-2 rated value</li> </ul>	25 kA				
<ul> <li>according to IEC 60947-2 rated value</li> </ul>	120 kA				
Dissipation					
power loss [W]	1.3 W				
power loss [W] for rated value of the current at AC in hot operating state per pole	1.3 W				
Mechanical Design					
width of the enclosure	21 mm				
mounting position	Any, preferably vertical				
net weight	131 g				
Environmental conditions					
ambient temperature during operation					
• minimum	-5 °C				
• maximum	40 °C				
environmental category	-20 to +50 at 95% relative humidity				
environmental category during storage	90% at 20°C				
Certificates					
reference code according to IEC 81346-2	FC				
General Product Approval	Declaration of Conformity	Test Certificates			

<u>Confirmation</u>		EHC	CE EG-Konf.	UK CA	Special Test Certific- ate
Test Certificates		Marine / Shipping	other		
<u>Miscellaneous</u>	Type Test Certific- ates/Test Report	13 DNV DNV	<u>Confirmation</u>	<u>Miscellaneous</u>	<u>Miscellaneous</u>
Environment					
https://press.siemens.c Siemens is working o Please contact your loo		e/siemens-wind-down-rus rent EAC certificates. status of validity of the EA	C certification if you intend	d to import or offer to supp	bly these products to an
Information on the pa	other than the sanctioned ickaging .siemens.com/cs/ww/en/v		ssia or Belarus).		
	nloadcenter (Catalogs,				
Industry Mall (Online		alog/product?mlfb=3NA6	801		
Service&Support (Ma	nuals, Certificates, Char siemens.com/cs/ww/en/p	acteristics, FAQs,)			
Image database (proc	luct images, 2D dimensi siemens.com/bilddb/cax r m/cax	on drawings, 3D models	s, device circuit diagram	s,)	

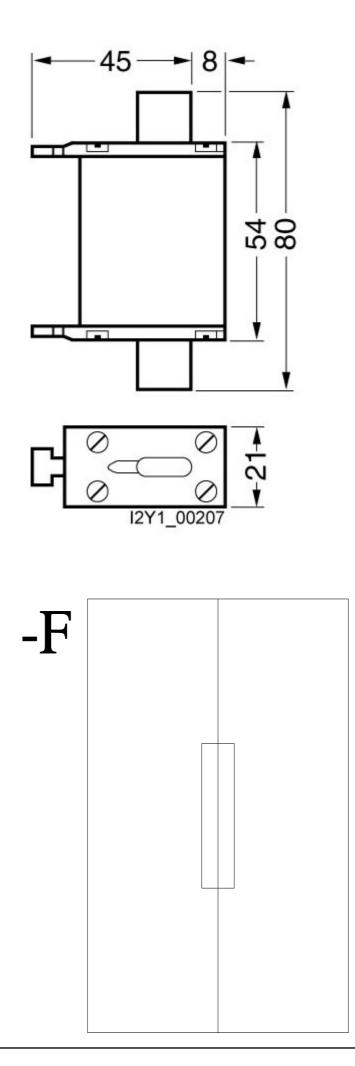

Subject to change without notice © Copyright Siemens

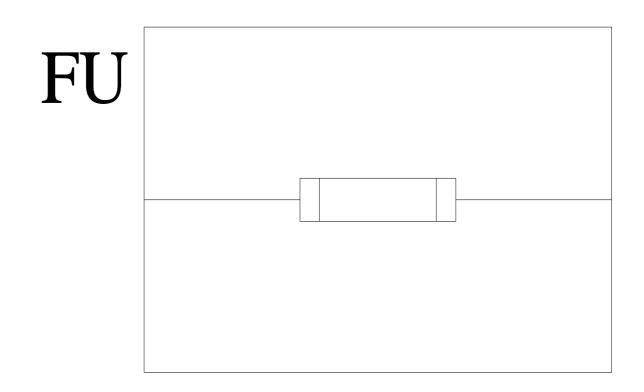

last modified:

2/14/2023 🖸