

MODLINK MSDD DBL COMBI INSERT GREAT BRITAIN

1xUSB, 1xRJ45 fem./fem. + RCD opening

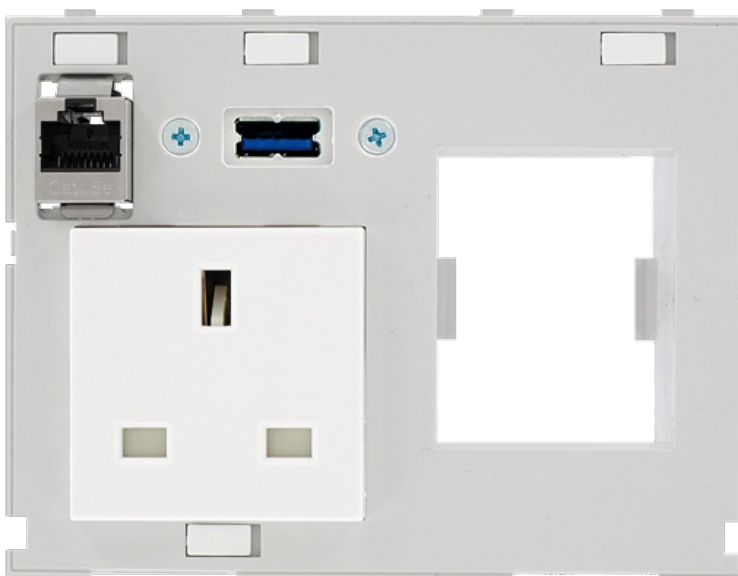
Great Britain (BS); RJ45; FI-cut-out; USB

1 × Great Britain (BS)

1 × RJ45, 8-pole metal, CAT5e (female/female)

1 × FI cut-out

1 × USB 3.0 (female/female) form A

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Dimensions H × W × D 88×116×70 mm

USB

Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	1.5 A
Locking of ports	Snap In
Specification	USB: 3.0 (max. 5 Gbit/s)

RJ45

Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current (UL Rating)	max. 175 mA
Connection front side	RJ45
Connection rear side	RJ45
Locking of ports	Snap In

Specification CAT5e, Class D, 100 MHz, (EN 50173-1)

England (BS)

Operating voltage 250 V AC

Operating current 13 A

No. of poles 2 + PE

Connection Screw terminals: max. 2 × 4 mm² (AWG 12)

Commercial data

country of origin DE

customs tariff number 85366990

EAN 4048879547079

eClass 27189217

Packaging unit 1