



COMPACT TRANSFORMERS

Ideal for standard systems where compact dimensions are a key installation requirement.

FEATURES

- Fixed secondary voltage: 24 V range
- 40 VA to 630 VA
- Noise filtering up to 220 VA
- Permanent laser engraved markings
- Multiple fixing options: standard plate mounting
DIN rail mounting optional
- Visible terminals ensure safe and reliable connections
- Supplied complete with voltage links

TECHNICAL DATA

APPROVALS: IEC/EN 61558-2-4, IEC/EN 61558-2-6

OPERATING TEMPERATURE: up to 35° C without derating

RECOMMENDED PROTECTION: Type T fuses for 40 VA and 63 VA
Type C MCBs for 100 VA and greater

FILTERED POWER SUPPLIES

A range of filtered power supplies for PLCs and other equipment requiring a voltage of 12 V DC or 24 V DC.

FEATURES

- Ripple factor < 3%
- Twin output terminals for ease of connection
- DIN rail or mounting plate fixing
- Noise filtering
- Integrated secondary fuse protection
- Supplied with busbar for quick connection between neutral and earth (up to 15 V)

TECHNICAL DATA

APPROVALS: IEC/EN 61558-2-6, UL, CSA

OPERATING TEMPERATURE: Up to 60° C without derating

control, signalling and safety isolation transformers

open type single phase



0442 35



0442 68



0442 71

Dimensions and technical information **p. 91**

IP 2X or IP XXB up to 400 VA
 IP XXA above 400 VA - IK 04
 Conform to IEC/EN 61558-2-2 and 2-4 or 2-6
 UL506 and CSA C22-2-N°66
 Products suitable for building into equipment conforming to EN 61131-2, EN 60204-1 and EN 61439 standards
 Insulated covers up to 1 000 VA provided
 Interference/disturbance filter included
 Screw fix to mounting plate or clip on to DIN rail up to 250 VA
 Supplied with 0V/Earth connection link up to 1 000 VA

Single phase

Pack	Cat. Nos.	Power in VA			Admissible instantaneous power at $\cos \varphi = 0.5$	
		according to IEC and CSA	according to UL	according to UL		
1	0442 31	40	40	52		
1	0442 32	63	63	87		
1	0442 33	100	100	150		
1	0442 34	160	140	250		
1	0442 35	250	210	420		
1	0442 36	400	300	900		
1	0442 37	630	500	1 700		
1	0442 38	1 000	700	2 000		
1	0442 39	1 600	700	8 500		
1	0442 40	2 500	1 400	3 300		

Secondary protection

Transformers can be protected by a gG type fuse **p. 76** or by a C type circuit breaker **p. 56**

Multiple fixing possibilities

- DIN rail **p. 26**
- Lina 12-5 plates **p. 23**
- Lina 25 plates **p. 23**

Single phase


Pack	Cat. Nos.	Power in VA			Admissible instantaneous power at $\cos \varphi = 0.5$	
		according to IEC and CSA	according to UL	according to UL		
Safety isolating transformers						
Primary : 230-400 V ± 15 V						
Secondary : 115-230 V						
Supplied with 2 links						
1	0442 61	40	40	50		
1	0442 62	63	63	86		
1	0442 63	100	100	150		
1	0442 64	160	140	250		
1	0442 65	250	210	430		
1	0442 66	400	300	1 200		
1	0442 67	630	500	1 600		
1	0442 68	1 000	700	2 000		
1	0442 69	1 600	700	6 100		
1	0442 70	2 500	1 300	7 100		
1	0442 71	4 000	2 400	11 400		

Modular transformers **p. 102**



Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>

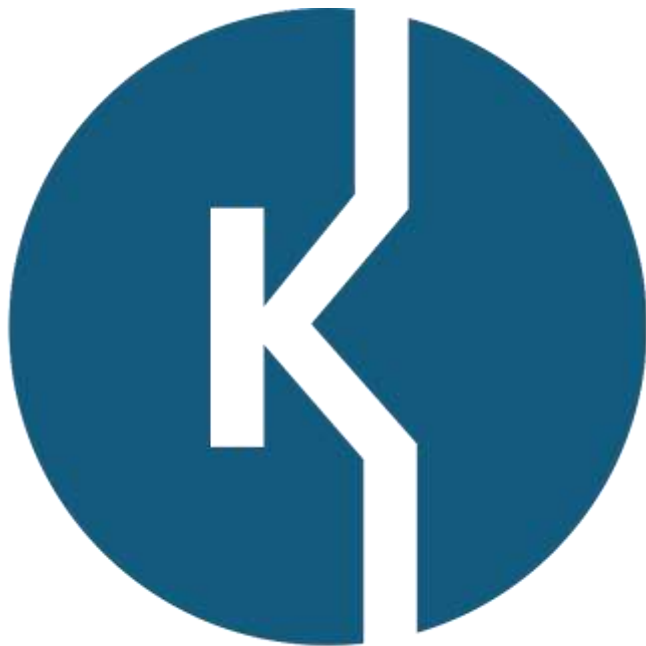

KEMPSTON
CONTROLS