



# CLX490-0011

CLX49x

**BAR CODE SCANNERS**

**SICK**  
Sensor Intelligence.



### Ordering information

| Type        | Part no. |
|-------------|----------|
| CLX490-0011 | 1019319  |

Other models and accessories → [www.sick.de/CLX49x](http://www.sick.de/CLX49x)



### Detailed technical data

#### Features

|                                       |   |
|---------------------------------------|---|
| <b>Version</b>                        | Standard Density  |
| <b>Connection type</b>                | Standard  |
| <b>Reading field</b>                  | Front   |
| <b>Scanner design</b>                 | X scanner (2 lines offset from each other at a 90° angle) |
| <b>Focus</b>                          | Auto focus (alternative: dynamic focus control)           |
| <b>No. of distance configurations</b> | ≤ 8   |
| <b>Focus adjustment time</b>          | ≤ 20 ms   |
| <b>Focus trigger source</b>           | Switching inputs "IN 0 ... IN 4" / data interface / timer |
| <b>Light source</b>                   | Visible red light (650 nm)                                |
| <b>MTBF</b>                           | 80,000 h  |
| <b>Laser class</b>                    | 2 (DIN EN 60825-1)  |
| <b>Aperture angle</b>                 | ≤ 60°   |
| <b>Scanning frequency</b>             | 600 Hz ... 1,200 Hz                                       |
| <b>Code resolution</b>                | 0.3 mm ... 1 mm   |
| <b>Reading distance</b>               | 500 mm ... 1,750 mm <sup>1)</sup>                         |
| <b>Heating</b>                        | With heating  |
| <b>On delay</b>                       | 35 ... 40 min at -35 °C and 24 V DC                       |

<sup>1)</sup> For details see reading field diagram.

#### Performance

|   |  |
|---|--|
| <b>Bar code types</b>                         | All current code types, Code 39, Code 128, Code 93, Codabar, GS1-128 / EAN 128, UPC / GTIN / EAN, Interleaved 2 of 5 |
| <b>Print ratio</b>                            | 2:1 ... 3:1  |
| <b>No. of codes per scan</b>                  | 1 ... 12 (Standard decoder)<br>1 ... 6 (SMART decoder)   |
| <b>No. of codes per reading interval</b>      | 1 ... 50 (auto-discriminating)   |
| <b>No. of characters per reading interval</b> | 600  |

|                                 |          |
|---------------------------------|----------|
| <b>No. of multiple readings</b> | 1 ... 99 |
|---------------------------------|----------|

## Interfaces

|                                     |   |
|-------------------------------------|---|
| <b>Serial (RS-232, RS-422/-485)</b> | ✓, AUX (only RS-232)  |
| Function                            | Host, AUX   |
| Data transmission rate              | 300 Baud ... 57,600 Baud, AUX: 9,600 baud   |
| <b>Ethernet</b>                     | ✓, optional via external connection module (CDM + CMF)                                |
| <b>CAN bus</b>                      | ✓   |
| Function                            | SICK CAN sensor network (Master/Slave, Multiplexer)                                   |
| Data transmission rate              | 10 kbit/s ... 1 Mbit/s  |
| Protocol                            | CANopen, CSN (SICK CAN Sensor Network)  |
| <b>PROFIBUS DP</b>                  | ✓, optional via external connection module (CDM + CMF)                                |
| <b>DeviceNet</b>                    | ✓, optional via external connection module (CDM + CMF)                                |
| <b>Switching inputs</b>             | 6 (Sensor, IN 0 ... IN 4)   |
| <b>Switching outputs</b>            | 4 ("Result 1" ... "Result 4")   |
| <b>Reading pulse</b>                | Switching input "Sensor" (+ "IN 4"), non-powered, data interface, OTS (Omni tracking) |
| <b>Optical indicators</b>           | 4 LEDs (function indicator)   |

## Mechanics/electronics

|                               |  |
|-------------------------------|--|
| <b>Electrical connection</b>  | 1 x 15-pin D-Sub HD device female connector                    |
| <b>Operating voltage</b>      | ≤ 24 V DC, ± 10 %  |
| <b>Power consumption</b>      | 90 W   |
| <b>Housing</b>                | Aluminum die cast, no materials containing silicone on outside |
| <b>Housing color</b>          | Light blue (RAL 5012)  |
| <b>Enclosure rating</b>       | IP 65 (EN 60529 (1991-10))                                     |
| <b>Protection class</b>       | III (EN 61140 (2002-03))                                       |
| <b>Weight</b>                 | 2,000 g  |
| <b>Dimensions (L x W x H)</b> | 208 mm x 152.6 mm x 175.5 mm                                   |

## Ambient data


|  |  |
|--|--|
| <b>Electromagnetic compatibility (EMC)</b> | EN 61000-6-2 (2001-10)<br>EN 61000-6-3 (2001-10)<br>EN 61000-6-3 / A11 (2004-07) |
| <b>Vibration resistance</b>                | EN 60068-2-6 (1995)  |
| <b>Shock resistance</b>                    | EN 60068-2-27 (1993)   |
| <b>Ambient operating temperature</b>       | -30 °C ... +35 °C  |
| <b>Storage temperature</b>                 | -20 °C ... +70 °C  |
| <b>Permissible relative humidity</b>       | ± 90 %, Non-condensing   |
| <b>Ambient light immunity</b>              | 2,000 lx, on bar code  |
| <b>Bar code print contrast (PCS)</b>       | ≥ 60 %   |

## General notes

|                         |              |
|-------------------------|--------------|
| <b>Life cycle phase</b> | Discontinued |
|-------------------------|--------------|

### Reading field diagram

Reading field height in mm (inch)

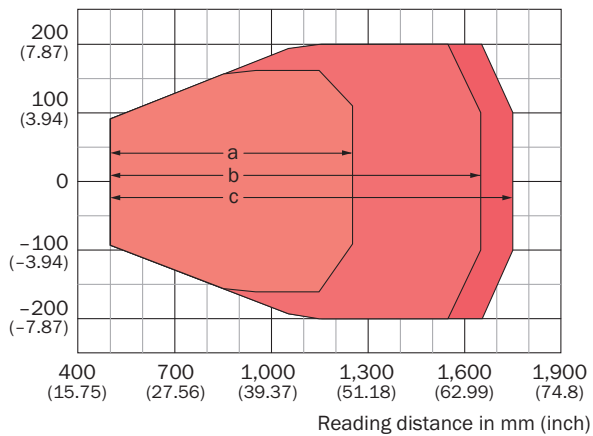


#### Resolution

- a: 0.30 mm (11.8 mil)
- b: 0.35 mm (13.8 mil)
- c: 0.50 mm (19.7 mil)

### Recommended accessories

Other models and accessories → [www.sick.de/CLX49x](http://www.sick.de/CLX49x)

|   | Brief description                            | Type             | Part no. |
|---|--|------------------|----------|
| <b>Mounting brackets and mounting plates</b>  |  |                  |          |
|  | Mounting bracket, mounting hardware included | Mounting bracket | 2022996  |
| <b>Modules</b>  |  |                  |          |
|   | Modular connection module for one sensor     | CDM490-0001      | 1025363  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)