

**Features**

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire SMART transmitters and 2-wire SMART current sources
- Output 0/4 mA ... 20 mA
- Terminals with test points
- High field voltage 17.6 V DC
- Up to SIL2 acc. to IEC 61508

**Function**

This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire and 3-wire SMART transmitters with higher output voltage in a hazardous area, and can also be used with 2-wire SMART current sources.

It transfers the analog input signal to the safe area as an isolated current value.

Digital signals may be superimposed on the input signal in the hazardous or safe area and are transferred bi-directionally.

If the HART communication resistance in the loop is too low, the internal resistance of 250 Ω between terminals 8 and 9 can be used.


Test sockets for the connection of HART communicators are integrated into the terminals of the device.

**Application**


The device supports the following SMART protocols:

- HART
- BRAIN
- Foxboro

**Assembly**

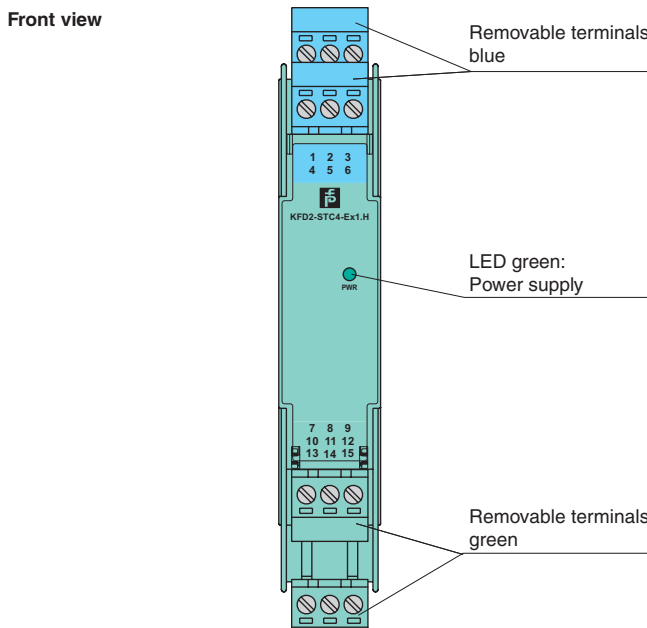

**Connection**

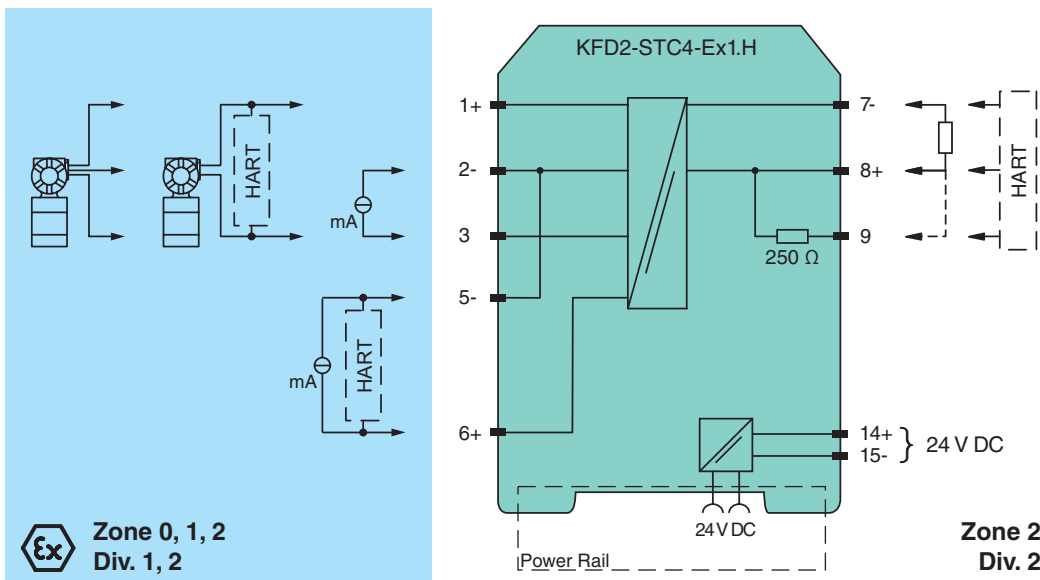

Release date 2012-10-12 16:54 Date of issue 2012-10-12 231393\_eng.xml

<b>General specifications</b>		
Signal type		Analog input
<b>Supply</b>		
Connection		Power Rail or terminals 14+, 15-
Rated voltage		20 ... 35 V DC
Ripple		within the supply tolerance
Power loss		1.5 W
Power consumption		1.9 W
<b>Input</b>		
Connection		terminals 1+, 2-, 3 or 5-, 6+
Input signal		0/4 ... 20 mA
Voltage drop		≤ 2.4 V at 20 mA (terminals 5, 6)
Input resistance		≤ 64 Ω terminals 2-, 3 ; ≤ 500 Ω terminals 1+, 3 (250 Ω load)
Available voltage		≥ 17.6 V at 20 mA terminals 1+, 3
<b>Output</b>		
Connection		terminals 7-, 8+, 9
Load		0 ... 800 Ω
Output signal		0/4 ... 20 mA (overload > 25 mA)
Ripple		≤ 50 μA <sub>rms</sub>
<b>Transfer characteristics</b>		
Deviation		at 20 °C (68 °F), 0/4 ... 20 mA ≤ 10 μA incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage
Influence of ambient temperature		0.25 μA/K
Frequency range		field side into the control side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 7.5 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V <sub>pp</sub> signal 0.3 ... 7.5 kHz (-3 dB)
Settling time		200 μs
Rise time/fall time		20 μs
<b>Electrical isolation</b>		
Output/power supply		functional insulation, rated insulation voltage 50 V AC
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2004/108/EC		EN 61326-1:2006
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2006
Protection degree		IEC 60529:2001
Protection against electrical shock		UL 61010-1
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Protection degree		IP20
Mass		approx. 200 g
Dimensions		20 x 124 x 115 mm (0.8 x 4.9 x 4.5 in) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with Ex-areas</b>		
EC-Type Examination Certificate		BAS 99 ATEX 7060 , for additional certificates see www.pepperl-fuchs.com
Group, category, type of protection		⊕ II (1)GD, [Ex ia] IIC, [Ex iaD], (-20 °C ≤ T <sub>amb</sub> ≤ 60 °C) [circuit(s) in zone 0/1/2]
Input		Ex ia IIC, Ex iaD
Supply		
Maximum safe voltage	U <sub>m</sub>	250 V (Attention! The rated voltage can be lower.)
Equipment		terminals 1+, 3-
Voltage	U <sub>o</sub>	27.2 V
Current	I <sub>o</sub>	93 mA
Power	P <sub>o</sub>	632 mW
Equipment		terminals 2-, 3
Voltage	U <sub>i</sub>	30 V
Current	I <sub>i</sub>	117 mA
Voltage	U <sub>o</sub>	3.5 V
Current	I <sub>o</sub>	73 mA
Power	P <sub>o</sub>	64 mW
Equipment		terminals 1+, 2 / 3-
Voltage	U <sub>o</sub>	27.2 V
Current	I <sub>o</sub>	117 mA
Power	P <sub>o</sub>	639 mW
Equipment		terminals 5-, 6+

Release date 2012-10-12 16:54 Date of issue 2012-10-12 231393\_eng.xml

Voltage	$U_i$	30 V
Current	$I_i$	117 mA
Voltage	$U_o$	8.7 V
Current	$I_o$	0 mA
<b>Output</b>		
Maximum safe voltage	$U_m$	250 V (Attention! The rated voltage can be lower.)
<b>EC-Type Examination Certificate</b>		
Group, category, type of protection		⊕ I (M1) [Ex ia] I
<b>Statement of conformity</b>		
Group, category, type of protection, temperature class		TÜV 99 ATEX 1499 X , observe statement of conformity ⊕ II 3G Ex nA II T4 [device in zone 2]
<b>Electrical isolation</b>		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
<b>Directive conformity</b>		
Directive 94/9/EC		EN 60079-0:2006, EN 60079-11:2007, EN 61241-11:2006 , EN 60079-15:2005 , EN 50303:2000
<b>International approvals</b>		
<b>UL approval</b>		
Control drawing		116-0173 (cULus)
<b>IECEX approval</b>		
Approved for		[Zone 0] [Ex ia] IIC, [Ex iaD], [Ex ia] I
<b>General information</b>		
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Accessories**

**Power feed module KFD2-EB2**  
 The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. A galvanically isolated mechanical contact uses the Power Rail to transmit collective error messages.

**Power Rail UPR-03**  
 The Power Rail UPR-03 is a complete unit consisting of the electrical inset and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

**Profile Rail K-DUCT with Power Rail**  
 The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



*Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!*