

# Rittal – The System.

Faster – better – everywhere.

## ▶ TS punched section with mounting flange, 23 x 73 mm – TS 8612.560

Date : May 6, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# TS punched section with mounting flange, 23 x 73 mm – TS 8612.560

created: 06.05.2019 build on [www.rittal.com/uk-en](http://www.rittal.com/uk-en)

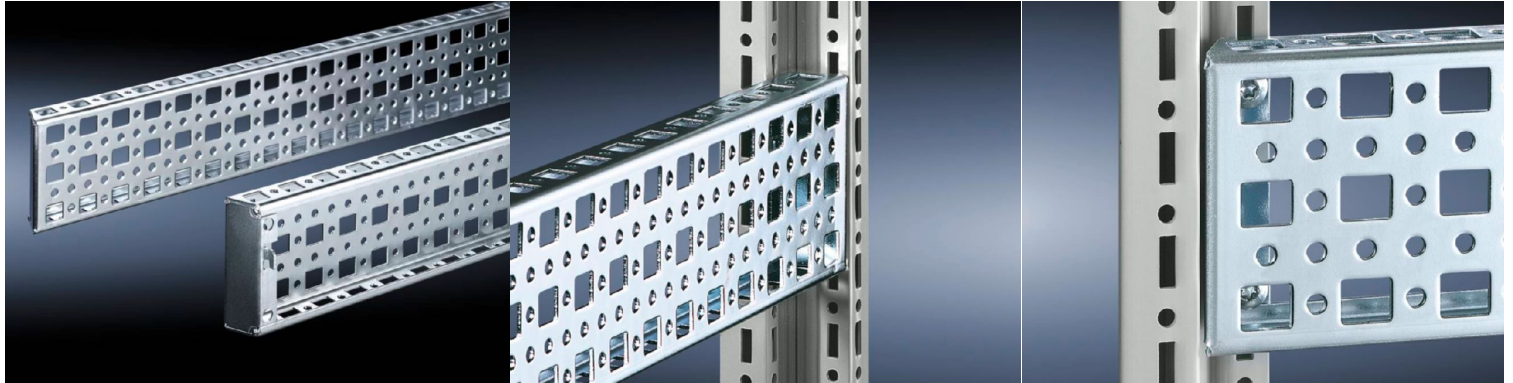

## Product description

<b>Description:</b>	The alternative to the TS punched section with mounting flange 17 x 73 mm, with punchings for captive nuts/threaded blocks instead of the slotted holes top and bottom. Simply locate and secure.
<b>Material:</b>	Sheet steel
<b>Surface finish:</b>	Zinc-plated
<b>Supply includes:</b>	Assembly screws

## Product features

<b>To fit:</b>	Enclosure type: the inner mounting level Width/depth: 600 mm
<b>Installation options:</b>	On the vertical TS, SE enclosure section
<b>Packs of:</b>	4 pc(s).
<b>Weight/pack:</b>	2.76 kg
<b>Copper weight (kg per piece):</b>	0
<b>EAN:</b>	4028177237391
<b>Customs tariff number:</b>	73269098

<b>ETIM 6.0:</b>	EC002625
<b>ETIM 5.0:</b>	EC002625
<b>eCl@ss 8.0/8.1:</b>	27189234
<b>eCl@ss 7.0/7.1:</b>	23159101
<b>eCl@ss 6.0/6.1:</b>	23159101
<b>eCl@ss 5.1/5.1.4:</b>	27189250
<b>Product description:</b>	TS TS punched section with mounting flange, 23 x 73 mm, for inner mounting level: W/D: 600 mm
<b>Approvals</b>	
<b>Certificates:</b>	EAC