

M8 male connector straight with cable PUR-OB 3x0,25 3m

Male straight
3-pole

Image



Vicarious picture

Approvals



Express shipments

Form

08001

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Locking of ports	Screw thread M8 x 1 mm (recommended torque = 0.4 Nm) self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C, depending on cable quality

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 11/12

Murrelektronik GmbH | Falkenstraße 3, D-71570 Oppenweiler | Fon +49 7191 470, Fax +49 7191 47-130 | info@murrelektronik.com | www.murrelektronik.com

Cable

No./diameter of wires	3 × 0.25 mm ²
Wire isolation	PVC (br, bl, bk)
C-track properties	2 Mio.
Jacket	PUR/PVC
Outer diameter	approx. 4.5 mm
Bend radius (mobile)	15 × outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C

Commercial data


Net weight	93
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

Comments

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

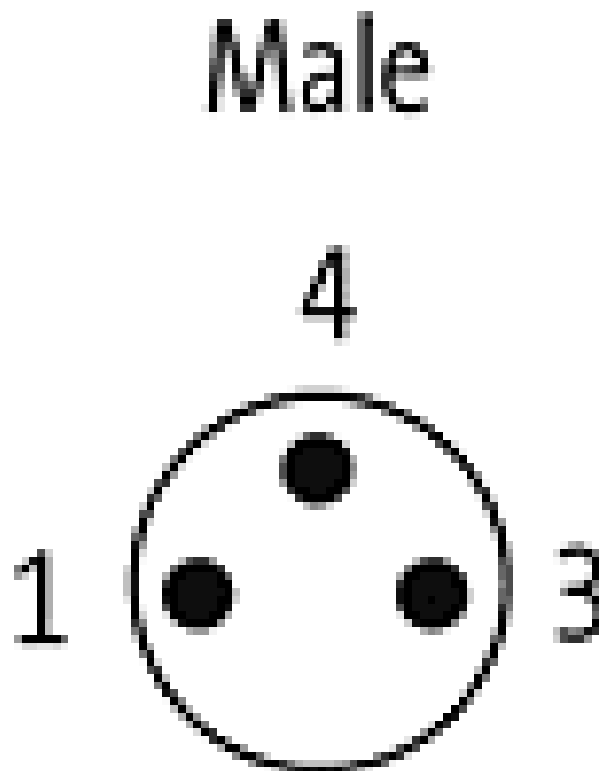

Dimension drawing

