



POL	MATERIAL NUMBER	ENGINEERING NUMBER
3	1200705204	8R3J460003
POL	MATERIAL NUMBER	ENGINEERING NUMBER
4	1200110281	8R4J460003
POL	MATERIAL NUMBER	ENGINEERING NUMBER
5	1200700235	8R5J460003



Panel Cut Out
max Panel thickness 4.5mm

MALE FACE VIEW acc. to IEC 61076-2-101

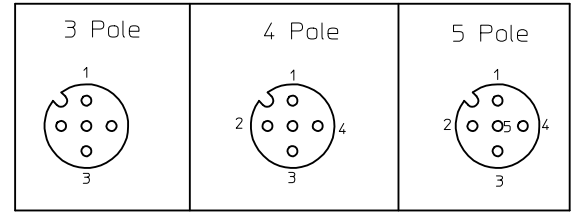

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 V
AMPERAGE RATING	4 AMPS
PROTECTION	IP68
ASSEMBLY IS RoHS COMPLIANT	

ITEM	COMPONENT	MATERIAL	FINISH
5	LOCKNUT	BRASS	BRIGHT NICKEL PLATED
4	O-RING	VITON	BLACK
3	RECEPTACLE SHELLS	BRASS	BRIGHT NICKEL PLATED
2	INSERT	PUR (30% GLASS FILLED)	-
1	CONTACT	BRASS (CuZn36)	GOLD OVER NICKEL

ENTER DESCRIPTION EC NO: IPG2013-0482 DRWN: CFOERDERER 2012/10/04 CHKD: RSILLER 2012/10/16 APPR: CBURGER 2012/10/29	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.05 ± --- 1 PLACE ± 0.10 ± --- 0 PLACE ± --- ± ---	mm INCH	DRAWN BY CFOERDERER	DATE 2012/10/04	TITLE REC M12 4P AC MA STR PVC XM			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY CBURGER	DATE 2012/10/29	MATERIAL NO. DOCUMENT NO.			
		ANGULAR ± .5 °		see Table		SHEET NO. 1 OF 1			



SD-120011-281

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION