SIEMENS

Data sheet 3NA6803



LV HRC fuse element, NH000, In: 10 A, gG, Un AC: 500 V, Un DC: 250 V, Combined indicator, Insulated grip lugs

product brand name product designation LV HRC fuse link design of the product design of an identification indicator design of the widentification indicator Combination alarms design of the switching contact Non-corroding, silver-plated design of the fuse link LV HRC fuse link LV HRC fuse link Ceneral technical data size of fuse system according to EN 60269-1 Operating class of the fuse link gG mounting type insulated grip lugs type of voltage of the operating voltage at AC rated value at AC rated value at DC 250 V Protection class Protection class Protection class IP Switching capacity current at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value 3 to AC according to IEC 60947-2 rated value 3 to AC according to IEC 60947-2 rated value 3 to AC according to IEC 60947-2 rated value 3 to AC according to IEC 60947-2 rated value 4 to AC according to IEC 60947-2 rated value 3 to AC according to IEC 60947-2 rated value 4 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 5 to AC according to IEC 60947-2 rated value 6 to AC according to IEC 60947-2 rated value 7 to AC according to IEC 60947-2 rated value 8 to AC according to IEC 60947-2 rated value 8 to AC according to IEC 60947-2 rated value 8 to AC according to IEC 60947-2 rated value 8 to AC accord					
product designation LV HRC fuse link design of the product With blade contacts design of an identification indicator Combination alarms design of the switching contact Non-corroding, sliver-plated LV HRC fuse link LV HRC fuse link LV HRC fuse link General technical data size of fuse system according to EN 60269-1 Operating class of the fuse link gG mounting type insulated grip lugs type of voltage of the operating voltage at AC rated value at AC rated value at AC rated value at DC Protection class protection class IP Switching capacity switching capacity current at CD according to IEC 60947-2 rated value at CD according to IEC 60947-2 rated value backers [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure mounting position ent weight 130 g Environmental conditions ambient temperature during operation imminum and to Correct and the size of the current at AC of the current and the correct and the correct and the correct and the current and the correct and th	Model				
design of the product design of an identification indicator design of the switching contact Non-corroding, silver-plated design of the fuse link LV HRC fuse link Ceneral technical data size of fuse system according to EN 60269-1 operating class of the fuse link g mounting type insulated grip lugs AC/DC supply voltage • at AC rated value • at DC 250 V Protection class IP Switching capacity switching capacity switching capacity switching capacity switching capacity ourrent • at DC according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure mounting position • minimum • 5° C • maximum • maximum • maximum • movinomental category environmental category environmental category environmental category environmental category reference code according to IEC 81346-2 FC	product brand name	SENT	SENTRON		
design of an identification indicator design of the switching contact Contact Contact Contact Non-corroding, sliver-plated design of the switching contact LV HRC fuse link Contact Con	product designation	LV HRC fuse link			
design of the switching contact design of the fuse link Ceneral technical data Size of fuse system according to EN 60269-1 Operating class of the fuse link General technical data size of fuse system according to EN 60269-1 Operating class of the fuse link gG mounting type Insulated grip lugs type of voltage of the operating voltage at AC rated value at AC rated value 500 V at DC 250 V Protection class protection class IP IP20, with connected conductors Switching capacity switching capacity current at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] power loss [W] power loss [W] width of the enclosure width of the enclosure 10 the mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum • maximum • more reference code according to IEC 81346-2 FC entiticates reference code according to IEC 81346-2 FC	design of the product	With blade contacts			
design of the fuse link Ceneral technical data size of fuse system according to EN 60269-1 operating class of the fuse link gG mounting type insulated grip lugs type of voltage of the operating voltage e at AC rated value e at DC 250 V Protection class protection class IP Switching capacity switching capacity switching capacity current e at DC according to IEC 60947-2 rated value e according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] power loss [W] power loss [W] power loss [W] suitch ind state per pole Mechanical Design width of the enclosure mounting position net weight 130 g Environmental conditions ambient temperature during operation e miximum e maximum environmental category environmental category environmental category during storage preference code according to IEC 81346-2 FC	design of an identification indicator	Combination alarms			
Second	design of the switching contact	Non-corroding, silver-plated			
size of fuse system according to EN 60269-1 operating class of the fuse link gG mounting type type of voltage of the operating voltage supply voltage • at AC rated value • at DC Protection class protection class IP Switching capacity switching capacity switching capacity current • at DC according to IEC 60947-2 rated value • at CD according to IEC 60947-2 rated value • at DC according to IEC 60947-2 rated value • at DC according to IEC 60947-2 rated value • at DC according to IEC 60947-2 rated value • at DN according to IEC 60947-2 rated value • according to IEC 60947-2 rated value Dissipation power loss [W] power loss [W] power loss [W] power loss [W] for rated value of the current at AC in hot operating state per pole Midchanical Design width of the enclosure mounting position and Any, preferably vertical net weight 130 g Invironmental conditions ambient temperature during operation • minimum • simimum • simimum • over the similar of the similar o	design of the fuse link	LV HRC fuse link			
operating class of the fuse link ge insulated grip lugs type of voltage of the operating voltage supply voltage • at AC rated value • at DC Protection class protection class IP Switching capacity switching capacity switching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 120 kA 120 kA Dissipation power loss [W] 1 W power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure mounting position net weight 130 g Environmental conditions ambient temperature during operation • minimum •	General technical data				
mounting type type of voltage of the operating voltage type of voltage of the operating voltage at AC rated value at DC 250 V Protection class protection class IP Switching capacity switching capacity switching capacity ournet at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value 120 kA Dissipation power loss [M] switch in according to IEC 60947-2 rated value 120 kA Dissipation power loss [M] protection class 1 W power loss [M] protection class IP Switching capacity IN power loss [M] power lose [M] protection class IP Switching capacity IN power lose [M] powe	size of fuse system according to EN 60269-1	NH000			
type of voltage of the operating voltage supply voltage at AC rated value at DC 250 V Protection class protection class IP IP20, with connected conductors Switching capacity switching capacity switching capacity current at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure mounting position net weight Environmental conditions ambient temperature during operation minimum mini	operating class of the fuse link	gG	gG		
supply voltage • at AC rated value • at DC 250 V Protection class protection class IP Switching capacity switching capacity switching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 25 kA • according to IEC 60947-2 rated value Dissipation power loss [W] power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure mounting position net weight 130 g Environmental conditions ambient temperature during operation • minimum -5 °C • maximum environmental category environmental category during storage 90% at 20°C Certificates reference code according to IEC 81346-2 FC	mounting type	insulated grip lugs			
at AC rated value at DC 250 V Protection class protection class IP Switching capacity switching capacity urrent at DC according to IEC 60947-2 rated value according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] power loss [W] power loss [W] Mechanical Design width of the enclosure mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation maximum menumental category environmental category during storage preference code according to IEC 81346-2 FC	type of voltage of the operating voltage	AC/DC			
• at DC Protection class protection class IP Switching capacity switching capacity switching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 120 kA Dissipation power loss [W]	supply voltage				
protection class IP IP20, with connected conductors Switching capacity switching capacity current • at DC according to IEC 60947-2 rated value 25 kA • according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure 21 mm mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20 °C Certificates reference code according to IEC 81346-2 FC	 at AC rated value 	500 V	500 V		
protection class IP IP20, with connected conductors Switching capacity switching capacity current • at DC according to IEC 60947-2 rated value 25 kA • according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure 21 mm mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20 °C Certificates reference code according to IEC 81346-2 FC	• at DC	250 V			
Switching capacity switching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] powe	Protection class				
switching capacity current • at DC according to IEC 60947-2 rated value • according to IEC 60947-2 rated value 120 kA Dissipation power loss [W] power loss [W] power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure mounting position net weight Environmental conditions ambient temperature during operation • minimum • minimum • minimum 40 °C environmental category environmental category during storage 90% at 20°C Certificates reference code according to IEC 81346-2 FC	protection class IP	IP20, with connected conductors			
according to IEC 60947-2 rated value according to IEC 60947-2 rated value 120 kA Pissipation power loss [W] 1 W power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure 21 mm mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20 °C Certificates reference code according to IEC 81346-2 FC	Switching capacity				
according to IEC 60947-2 rated value Dissipation power loss [W] 1 W power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure 21 mm mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20 °C Certificates reference code according to IEC 81346-2 FC	switching capacity current				
Dissipation power loss [W] 1 W power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure 21 mm mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum -5 °C • maximum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20 °C Certificates reference code according to IEC 81346-2 FC	 at DC according to IEC 60947-2 rated value 	25 kA	25 kA		
power loss [W] 1 W power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure 21 mm mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum -5 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20°C Certificates reference code according to IEC 81346-2 FC	 according to IEC 60947-2 rated value 	120 kA			
power loss [W] for rated value of the current at AC in hot operating state per pole Mechanical Design width of the enclosure 21 mm mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum -5 °C • maximum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20 °C Certificates reference code according to IEC 81346-2 FC	Dissipation				
operating state per pole Mechanical Design width of the enclosure 21 mm mounting position Any, preferably vertical net weight 130 g Environmental conditions ambient temperature during operation • minimum -5 °C • maximum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20 °C Certificates reference code according to IEC 81346-2 FC	power loss [W]	1 W			
width of the enclosure mounting position Any, preferably vertical 130 g Environmental conditions ambient temperature during operation • minimum • maximum 40 °C environmental category environmental category during storage Certificates reference code according to IEC 81346-2 FC		1 W			
mounting position net weight 130 g Environmental conditions ambient temperature during operation • minimum • maximum • maximum 40 °C environmental category environmental category during storage Certificates reference code according to IEC 81346-2 FC	Mechanical Design				
net weight Environmental conditions ambient temperature during operation • minimum • maximum • maximum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20°C Certificates reference code according to IEC 81346-2 FC	width of the enclosure	21 mr	21 mm		
Environmental conditions ambient temperature during operation ● minimum ● maximum ● maximum ● moximum 40 °C environmental category environmental category during storage Certificates reference code according to IEC 81346-2 FC	mounting position	Any, p	Any, preferably vertical		
ambient temperature during operation	net weight	130 g			
 minimum 5 °C maximum 40 °C environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20°C Certificates reference code according to IEC 81346-2 FC	Environmental conditions				
 maximum environmental category environmental category during storage 90% at 20°C Certificates reference code according to IEC 81346-2 FC 	ambient temperature during operation				
environmental category -20 to +50 at 95% relative humidity environmental category during storage 90% at 20°C Certificates reference code according to IEC 81346-2 FC	• minimum	-5 °C	-5 °C		
environmental category during storage 90% at 20°C Certificates reference code according to IEC 81346-2 FC	• maximum	40 °C			
Certificates reference code according to IEC 81346-2 FC	environmental category	-20 to +50 at 95% relative humidity			
reference code according to IEC 81346-2 FC	environmental category during storage	90% at 20°C			
The state of the s	Certificates				
General Product Approval Declaration of Conformity Test Certificates	reference code according to IEC 81346-2	FC			
	General Product Approval		Declaration of Conformity	Test Certificates	









Miscellaneous

Test Certificates

Marine / Shipping

other

Type Test Certificates/Test Report

Special Test Certificate



Miscellaneous

Confirmation

Miscellaneous

Environment

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA6803

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3NA6803

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA6803


CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

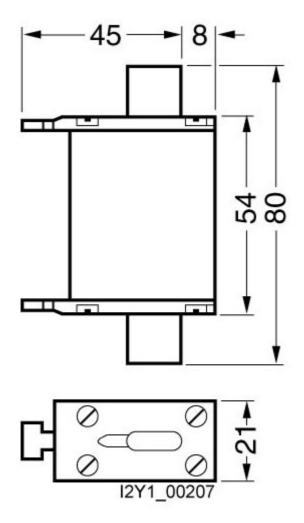

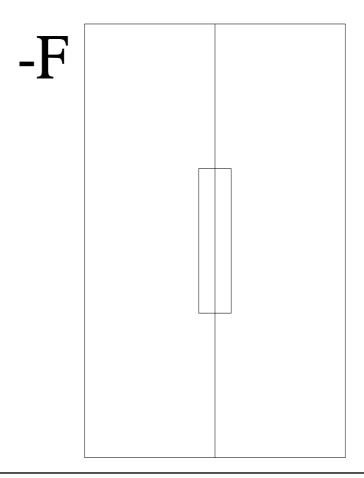

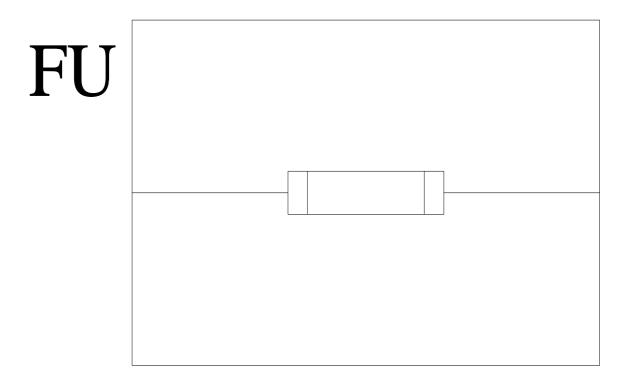

last modified: 2/14/2023 🖸