


- Universal module

NOTE

The terminal number corresponds to the connector number

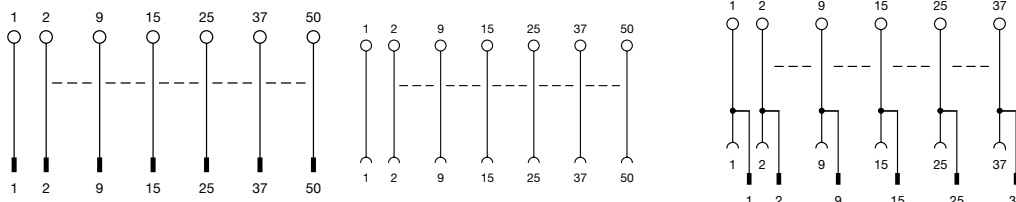

CODE	XISD25PM	XISD25PF	XISD25FM
TYPE	ISD25PM	ISD25PF	ISD25FM
GENERAL TECHNICAL DATA			
Number of poles	25	25	25
Version	D-sub male	D-sub female	D-sub male + female
Input rated voltage	0...25 Vac / 0...60 Vdc	0...25 Vac / 0...60 Vdc	0...25 Vac / 0...60 Vdc
Input rated current	2 A max	2 A max	2 A max
Operating temperature	-20...+60°C	-20...+60°C	-20...+60°C
Standards approvals	—	—	—
Overvoltage category / pollution degree	II / 2	II / 2	II / 2
Protection degree	IP 00	IP 00	IP 00
Connection terminal	2.5 mm ² screw	2.5 mm ² screw	2.5 mm ² screw
Status indication	—	—	—
Dimensions	70x66x93 mm	70x66x93 mm	70x66x93 mm
Approximate weight	—	—	—
Housing material	UL94V-0 plastic material	UL94V-0 plastic material	UL94V-0 plastic material
Mounting informations	vertical on rails, side by side	vertical on rails, side by side	vertical on rails, side by side
APPROVALS	CE	CE	CE
ACCESSORIES			
Mounting rail IEC60715 TH35 75	PR003, PR903, PR005, PR907	PR003, PR903, PR005, PR911	PR003, PR903, PR005, PR915
Mounting rail IEC60715 TH35 15	PR007, PR907, PR006, PR908	PR007, PR907, PR006, PR912	PR007, PR907, PR006, PR916
Marking tag	—	—	—