


Silicone heating cable

Isopad IT-KDL heating cables are specifically designed for internal and external heating of refrigeration drainlines and freezer doors. KDLs are constructed from silicone rubber, making them

water resistant, and are supplied factory terminated in standard lengths. IT-KDL-SRs are specially produced in a small round form, making them very flexible and ideal for small bore drainlines.

Flexible SL and SR versions are standard; SLS and SRS variants are constructed with a steel braiding.

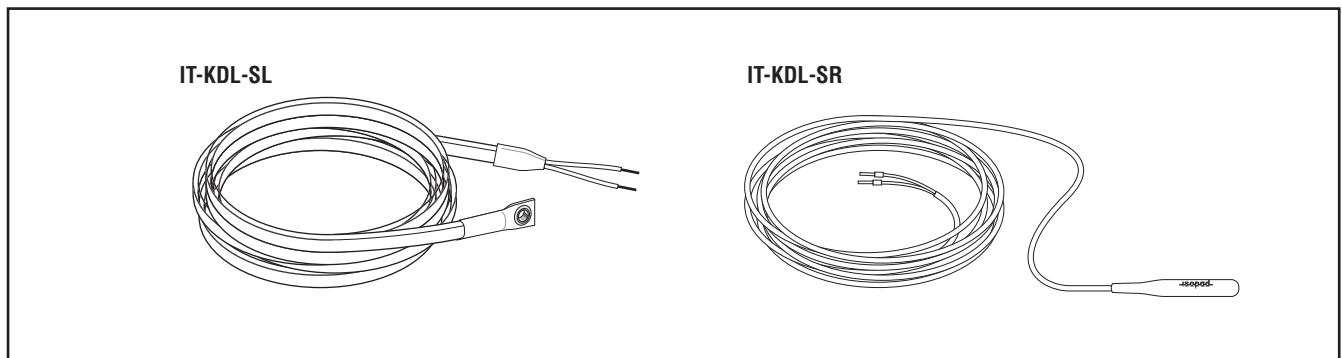

Area Specifications

	IT-KDL-SL	IT-KDL-SR
Area classification	Nonhazardous, ordinary area	Nonhazardous, ordinary area
Ingress protection	IP67	IP67
Electrical protection class	Class II	See note
Maximum withstand temperature (power off)	220°C	200°C
Minimum installation temperature	-50°C	-40°C

Note: These are components for further installation. The protective arrangements of Protection Class I or Class II must be followed during installation of the components and are the responsibility of the assembly company - please refer to the manual for further information.

Standard Manufacturing Sizes

	IT-KDL-SL	IT-KDL-SR
Width	9.5 mm $\pm 10\%$	-
Thickness	6.25 mm $\pm 10\%$	-
Outer diameters	-	5 mm $\pm 10\%$ (7.5 mm $\pm 10\%$ over moulded end)

Heater Construction

Type	Resistance heating cable
Material	Various alloys
Material of insulation	Silicone
Material of outer sheath	Silicone

Technical Data

	IT-KDL-SL	IT-KDL-SR
Frequency	50-60 Hz	50-60 Hz
Nominal operating voltage	230 Vac	230 Vac
Power per meter	40 W/m	40 W/m
Maximum operating temperature	220°C	200°C
Minimum bend radius	20 mm	5 mm
Minimum spacing	10 mm	10 mm

Ordering Information

	Part number	Length ⁽¹⁾ (m)	Nominal power ⁽²⁾ (W)	Nominal voltage (Vac)
IT-KDL-SL	281332-000	1	40	230
	643140-000	2	80	230
	421844-000	3	120	230
	311936-000	4	160	230
	159372-000	5	200	230
	778676-000	6	240	230
IT-KDL-SR	057068-000	1	40	230
	456554-000	2	80	230
	998142-000	3	120	230
	863032-000	4	160	230
	148900-000	5	200	230
	361534-000	6	240	230

⁽¹⁾ Tolerances <2000 mm ± (1% + 50 mm)
>2000 mm ± (2% + 100 mm)

⁽²⁾ Tolerances ±10%

Worldwide Headquarters**Tyco Thermal Controls**

7433 Harwin Drive
Houston, TX 77036
USA
Tel: 800-545-6258
Tel: 650-216-1526
Fax: 800-527-5703
Fax: 650-474-7711
info@tycothermal.com
www.tycothermal.com

Canada**Tyco Thermal Controls**

250 West St.
Trenton, Ontario
Canada K8V 5S2
Tel: 800-545-6258
Fax: 800-527-5703

Latin America**Tyco Thermal Controls**

7433 Harwin Drive
Houston, TX 77036
United States
Tel: 713-868-4800
Tel: 713-735-8645
Fax: 713-868-2333

Europe, Middle East, Africa (EMEA)**Tyco Thermal Controls**

Romeinse Straat 14
3001 Leuven
België / Belgique
Tel: +32 16 213 511
Fax: +32 16 213 603

Asia Pacific**Tyco Thermal Controls**

20F, Innovation Building
1009 Yi Shan Rd
Shanghai 200233
P.R.China
Tel: +86 21 2412 1688
Fax: +86 21 5426 2937 / 5426 3167

Tyco, Alliance Integrated Systems, AMC, AutoMatrix, AutoSol, BTV, CapaciSense, Chemelex, DHSX, DigiTrace, DigiTrace logo, DigiTrace Supervisor, Duoterm, ElectroMelt, EM2XR, FHSM, FHSC, FlexFit, FlexiClic, Flowguard, FreezeTrace, FreezGuard, Frostex, Flostex Plus, Frostguard, FroStop, FSE, Gardian, HAK, Handvise, HBTv, HCCL, HotCap, HQTv, HTPG, HTPI, HWAT, HXTv, IceStop, Interlock, Isocable, Isodrum, Isoheat, Isomantle, Isopad, Isopad Frostguard, Isopad logo, Isopanel, Isotape, Isotherm, JBM, JBS, K-Flex, K-Flex logo, KHE, KHH, KHL, KHP, KTV, Labsafe, LBTV, LHC, LHFV, LHRV, Metabond, Mini WinterGard, Miser WinterGard, MoniTrace, Multi-plus, NGC, PetroTrace, PLI, PolyMatrix, Pyro CiC, PyroFLX, Pyromaster, Pyropak, Pyrosil, PyroSizer, Pyrotenax, Pyrotenax Designer, Pyrotenax logo, QTVR, QuickNet, QuickNet logo, QuickStat, QuickTerm, RayClic, RaySol, RayStat, Retro WinterGard, RHS, RHSC, RHSM, RMM2, SBF, SBV, SC, SHC, Sheathmaster, ShowerGuard, SLBTV, Smart heat for Comfort and Safety, SnoCalc, SnoCalc logo, STS, System 500, System 1850, System 1850-SE, System 2000, System 2200, T2, T2 logo, T2Blue, T2QuickNet, T2Red, T2Reflecta, TankCalc Plus, TempBus, Thermoheat, ThermoLimit, Thermo-Line, Total Care in Heat-tracing, Touch, Trac-Loc, Trac Calc, TraceCalc Net, TraceCalc Net logo, TraceCalc Pro logo, TraceGuard 277, TraceMaster, Tracer, Tracer logo, TRACERLYNX, TRACERLYNX logo, TraceStat, TraceTek, TraceTek logo, TruckPak, VLBTv, VLKTV, VPL, We manage the heat you need, WinterGard, WinterGard logo, WinterGard Plus, WinterGard Wet, XL-ERATE, XL-ERATE logo, XL-Trace, XTV and Zero EMI are registered and/or unregistered trademarks of Tyco Thermal Controls LLC or its affiliates.

All other trademarks are the property of their respective owners.

tyco

Thermal Controls

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.