


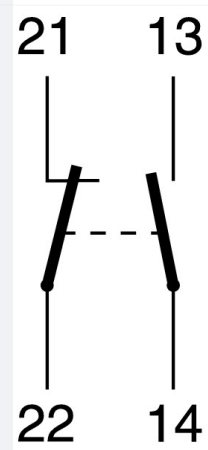

Auxiliary contact, for FAZ-NA, FAZ-RT, 1N/O+1N/C, 0.5HP

**Part no.** Z-IHK-NA  
**Catalog No.** 113895  
**Eaton Catalog No.** Z-IHK-NA

### Delivery program

Basic function		Accessories for miniature circuit-breaker
Basic function accessories		Auxiliary contacts
Application		Switchgear for export to North America (UL-listed)
Product range		Accessory
Side mounting		for fitting on left to: FAZ-NA, FAZ-RT
Contact sequence		

### Technical data

#### Electrical

Contact function			1 M/1 B
Rated operational voltage	$U_e$	V AC	250
Rated frequency	$f$	Hz	50/60
Rated current	$I_e$	A	6
Conventional free air thermal current	$I_{th}$	A	6
Rated operational current			
AC-15	$I_e$	A	2 (250 V AC)
AC-12	$I_e$	A	3 (250 V AC)
DC-13	$I_e$	A	0.5 (110 V DC)
Rated insulation voltage	$U_i$	V AC	250
Minimum operating voltage per contact	$U_{min}$	V DC	5
Rated impulse withstand voltage	$U_{imp}$	kV	4
Rated conditional short-circuit current With 6 A back-up fuse	$I_{sc}$	kA	1

#### Mechanical

Standard front dimension		mm	45
Enclosure height		mm	80
Mounting width		mm	8.8 (0.5 SU)
Degree of protection			
Integrated			IP40

Terminal protection			Busbar tag shroud to BGV A3
Terminals			Lift terminals
Tightening torque of terminal screws		Nm	≤ 1.2

## Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	-5
Operating ambient temperature max.		°C	40

## Technical data ETIM 7.0

Devices for distribution board-/surface mounting (EG000062) / Auxiliary device for distribution board devices (EC001286)			
Electric engineering, automation, process control engineering / Electrical installation, device / Breaker switch component / Auxiliary contact unit for distribution board (ec1@ss10.0.1-27-14-35-02 [AKE327013])			
Device fitting			Miniature circuit breaker (MCB)
Additional equipment			Auxiliary switch
Attached at delivery			No
Assembly width (TE)			0.5
Number of contacts as normally open contact			1
Number of contacts as normally closed contact			1
Number of contacts as change-over contact			0
Number of fault-signal switches			0
Rated switch current		A	6
Rated voltage		V	250
Voltage type for actuating			AC
With auto test for earth leakage function			No
Suitable for max. number of poles main contact unit (total)			2
Suitable for max. current main contact unit		A	6

## Approvals

Product Standards			IEC/EN 60898; UL 489; CSA-C22.2 No. 5-09; CE marking
UL File No.			E257181
UL Category Control No.			DIHS, DIHS7
CSA File No.			204453
CSA Class No.			1437-01
North America Certification			UL listed, CSA certified
Degree of Protection			IEC: IP20, UL/CSA Type: -

## Dimensions

