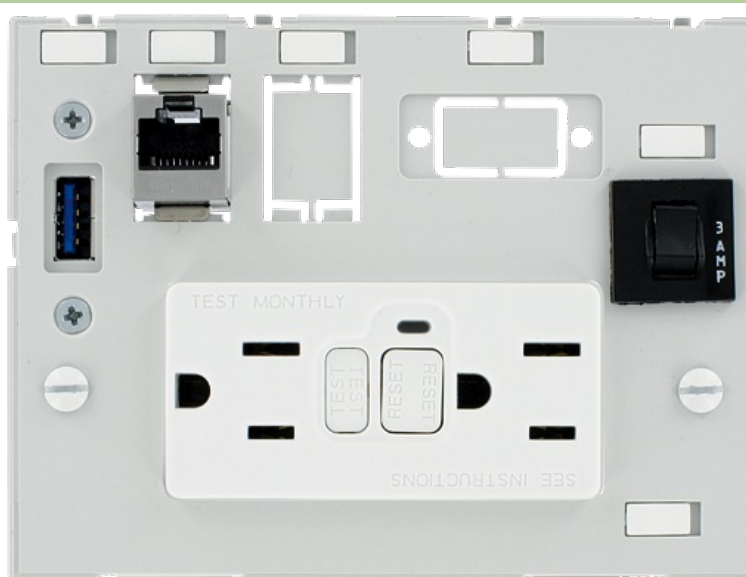


**MODLINK MSDD DBL COMBI INSERT USA 2XNEMA 5-15**

GFCI+ 1xRJ45 fem./fem.+ 1xUSB-A fem./fem.+ 1x3A fuse

- 2 × NEMA-GFCI 5-15 (screw terminals)
- 1 × RJ45, 8-pole metal, CAT5e (female/female)
- 1 × USB (female/female) form A
- 1 × fuse (3 A)

[Link to Product](#)**Illustration**

Product may differ from Image

**Approvals****General data**

Dimensions H × W × D 88×110×72 mm

**USB**

Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	1.5 A
Locking of ports	Snap In
Specification	USB: 3.0 (max. 5 Gbit/s)

**RJ45**

Operating voltage (UL Rating) max. 30 V AC/42.4 V DC

Operating current (UL Rating)	max. 175 mA
Connection front side	RJ45
Connection rear side	RJ45
Locking of ports	Snap In
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

**Fuse**

Operating voltage	250 V AC/32 V DC
Continuous load	3 A

**USA**

Operating voltage	125 V AC
Operating current	15 A
No. of poles	2 + PE
Connection	Screw terminals: max. 2 × 6 mm <sup>2</sup> (AWG 10)

**Commercial data**

country of origin	CN
customs tariff number	85366990
EAN	4048879369251
eClass	27189217
Packaging unit	1