



Model Number

ML100-8-W-200-RT/95/103

Diffuse mode sensor with 4-pin, M8 x 1 connector


Features

- Miniature design •
- Easy to use •
- Very bright, highly visible light spot •
- Full metal thread mounting •
- Highly visible LEDs for Power ON and switching state
- Not sensitive to ambient light ٠


Product information

The ML100 series is characterized by its miniature housing with integral, all-metal threaded bushings. All versions are equipped with a visible red transmitter LED. This greatly simplifies installation and commissioning. The switching states are easily visible from all directions thanks to the highly visible LEDs.

Dimensions

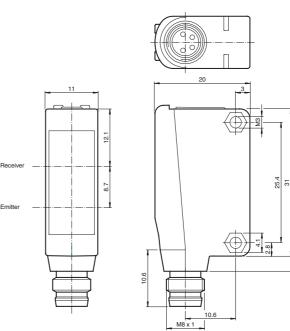

Electrical connection




Pinout



Indicators/operating means

²₁ 3



1	Light-Dark-switching	
2	Sensitivity adjuster	
3	Signal display	yellow
4	Operating display	green

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



ML100-8-W-200-RT/95/103

Technical data			Accessories
General specifications			OMH-ML100-01
Detection range		0 200 mm	Mounting aid for ML100 series, Mounting
Adjustment range		15 200 mm	bracket
Reference target		standard white, 200 mm x 200 mm	bracket
Light source		LED	OMH-ML100-03
Light type		modulated visible red light	Mounting aid for round steel ø 12 mm or
Polarization filter		no	sheet 1.5 mm 3 mm
Diameter of the light spot		approx. 170 mm at a distance of 200 mm	
Optical face		frontal	OMH-ML100-04
Ambient light limit		EN 60947-5-2:2007+A1:2012	Mounting aid for ML100 series, Mounting
Functional safety related page	arameters		bracket
MTTFd		860 a	
Mission Time (T _M)		20 a	OMH-ML100-05
Diagnostic Coverage (DC)		0 %	Mounting aid for ML100 series, Mounting
Indicators/operating mean	s		bracket
Operation indicator	•	LED green: power on	brachet
Function indicator		LED yellow, lights up with receiver lit	OMH-F10-ML100
Control elements		sensitivity adjustment	Mounting aid for ML100 series
Control elements		Light-on/dark-on changeover switch	
		Light-on/dark-on changeover switch	OMH-10
Electrical specifications		10 001/00	Mounting aid
Operating voltage	UB	10 30 V DC	
Ripple		max. 10 %	OMH-ML100-S1
No-load supply current	I ₀	< 20 mA	Mounting bracket
Output			V31-GM-2M-PUR
Switching type		The switching type of the sensor is adjustable. The default set- ting is: light on	Female cordset, M8, 4-pin, PUR cable
Signal output		1 PNP output, short-circuit protected, reverse polarity protected, open collector	V31-WM-2M-PUR
Switching voltage		max. 30 V DC	Female cordset, M8, 4-pin, PUR cable
Switching current		max. 100 mA , resistive load	
Voltage drop	U _d	≤ 1.5 V DC	OMH-ML100-08
Switching frequency	f	1000 Hz	Mounting aid for ML100 series, Snap-in
Response time		0.5 ms	Other suitable accessories can be found at
Ambient conditions			www.pepperl-fuchs.com
Ambient temperature		-30 60 °C (-22 140 °F)	www.peppen-lucits.com
Storage temperature		-40 70 °C (-40 158 °F)	
Mechanical specifications			
Degree of protection		IP67	
Connection		Male connector M8 x 1 , 4-pin	
Material			
Housing		PC (Polycarbonate)	
Optical face		РММА	
Mass		approx. 10 g	
Tightening torque, fastening	screws	0.6 Nm	
Compliance with standards	•		
ves			
Directive conformity	=0		
EMC Directive 2004/108/E	_0	EN 60947-5-2:2007+A1:2012	
Standard conformity		11 60047 5 0	
Standards		UL 60947-5-2	
Approvals and certificates	3		
UL approval		cULus Listed, Class 2 Power Source or listed Power Supply with a limited voltage output with (maybe integrated) fuse (max. 3.3 A according UL248), Type 1 enclosure	

CCC approval

CCC approval / marking not required for products rated ${\leq}36~V$

Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

Pepperl+Fuchs Group www.pepperl-fuchs.com

2


USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com


Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Curves/Diagrams

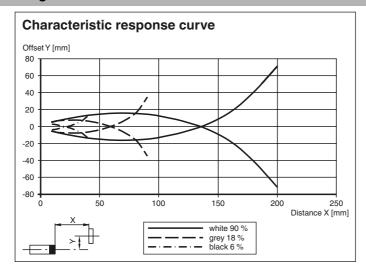

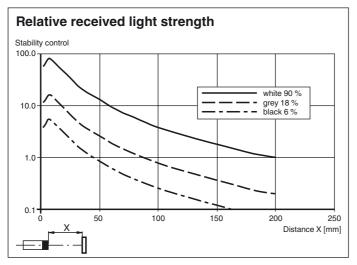

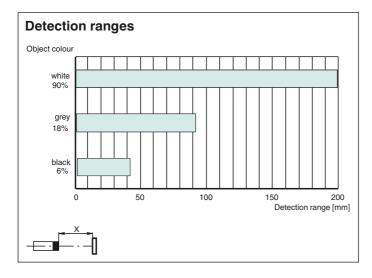

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

