

Contactor relay, 91E, EN 50011, 9 NO + 1 NC, screw terminal, AC operation, 230 V AC 50/60 Hz



Figure similar

General technical data:	
Size of contactor	0
Ambient temperature during operation	-25 ... +55 °C
Protection class IP on the front	IP20
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Equipment marking acc. to DIN EN 61346-2	K
Equipment marking acc. to DIN EN 81346-2	K
Control circuit/ Control:	
Type of voltage of the control supply voltage	AC
Control supply voltage frequency	<ul style="list-style-type: none"> • 1 rated value 50 Hz • 2 rated value 60 Hz
Control supply voltage	<ul style="list-style-type: none"> • at AC <ul style="list-style-type: none"> — at 50 Hz — rated value 230 V

— at 60 Hz
— rated value

230 V

Auxiliary circuit:

Operating current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	6 A
Identification number and letter for switching elements	91 E
Number of NC contacts for auxiliary contacts	1
• lagging switching	0
• delayed switching	0
• make-before-break switching	0
Number of NO contacts for auxiliary contacts	9
• delayed switching	0
• leading contact	0
• make-before-break switching	0
Number of CO contacts for auxiliary contacts	0

Connections/ Terminals:

Type of electrical connection for auxiliary and control current circuit	screw-type terminals
--------------------------------------------------------------------------------	----------------------

Mechanical data:

Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Width	55 mm
Height	78 mm
Depth	102 mm

Certificates/approvals

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
--------------------------	---------------------------------------	---------------------------



[Type Examination](#)



Test Certificates	Shipping Approval	other
-------------------	-------------------	-------

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[Miscellaneous](#)



GL

[Environmental Confirmations](#)

[Miscellaneous](#)

other

[Confirmation](#)

Safety related data:

Protection against electrical shock	finger-safe
B10 value with high demand rate acc. to SN 31920	1 000 000
• Note	With 0.3 x I _e
T1 value for proof test interval or service life acc. to IEC 61508	20 y

Further information



Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TH4391-0AL2>

Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TH4391-0AL2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3TH4391-0AL2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH4391-0AL2&lang=en

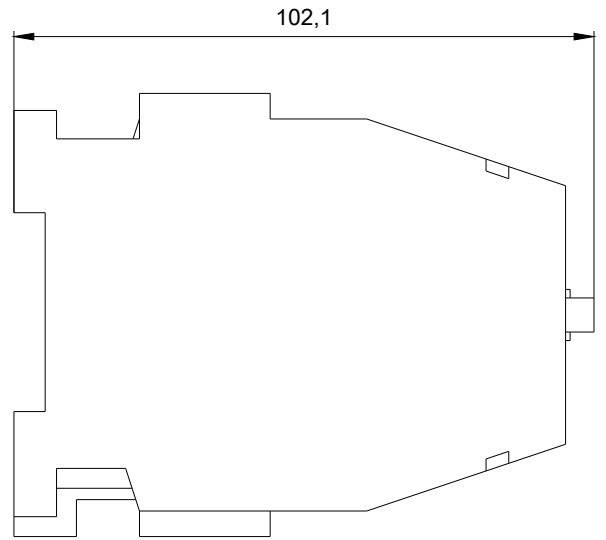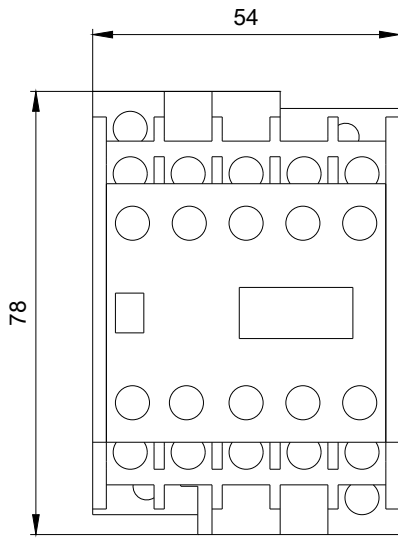

W9.4444: 3TH43
W9.2917: 3TH43

last modified:

02/27/2018