

CONTACTOR RELAY, 4NO, DC 24 V, CAGE CLAMP
CONNECTION, SIZE S00



Figure similar

Product brand name	SIRIUS
Product designation	contactor relay
General technical data	
Size of contactor	S00
Product extension	
• Auxiliary switch	Yes
Insulation voltage	
• with degree of pollution 3 rated value	690 V
Degree of pollution	3
Surge voltage resistance rated value	6 kV
Protection class IP	
• on the front	IP20
Shock resistance	10g / 5 ms and 5g / 10 ms
Mechanical service life (switching cycles)	
• of contactor typical	30 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000

<ul style="list-style-type: none"> • of the contactor with added auxiliary switch block typical 	10 000 000
Equipment marking	
<ul style="list-style-type: none"> • acc. to DIN EN 61346-2 	K
<ul style="list-style-type: none"> • acc. to DIN EN 81346-2 	K
Ambient conditions	
Installation altitude at height above sea level	
<ul style="list-style-type: none"> • maximum 	2 000 m
Ambient temperature	
<ul style="list-style-type: none"> • during operation 	-25 ... +60 °C
<ul style="list-style-type: none"> • during storage 	-55 ... +80 °C
<ul style="list-style-type: none"> • during transport 	-55 ... +80 °C
Control circuit/ Control	
Type of voltage of the control supply voltage	DC
Control supply voltage at DC	
<ul style="list-style-type: none"> • rated value 	24 V
Operating range factor control supply voltage rated value of magnet coil at DC	
<ul style="list-style-type: none"> • initial value 	0.8
<ul style="list-style-type: none"> • Full-scale value 	1.1
Closing power of magnet coil at DC	3.2 W
Holding power of magnet coil at DC	3.2 W
Auxiliary circuit	
Number of NC contacts	
<ul style="list-style-type: none"> • for auxiliary contacts 	0
<ul style="list-style-type: none"> — instantaneous contact 	0
<ul style="list-style-type: none"> — delayed switching 	0
<ul style="list-style-type: none"> — lagging switching 	0
<ul style="list-style-type: none"> — make-before-break switching 	0
Number of NO contacts	
<ul style="list-style-type: none"> • for auxiliary contacts 	4
<ul style="list-style-type: none"> — instantaneous contact 	4
<ul style="list-style-type: none"> — delayed switching 	0
<ul style="list-style-type: none"> — leading contact 	0
<ul style="list-style-type: none"> — make-before-break switching 	0
Number of CO contacts	
<ul style="list-style-type: none"> • for auxiliary contacts 	0
<ul style="list-style-type: none"> • of auxiliary contacts instantaneous contact 	0
Identification number and letter for switching elements	40 E
Operating current at AC-12 maximum	10 A

Operating current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
Operating current at 1 current path at DC-12	
• at 24 V rated value	10 A
• at 110 V rated value	3 A
• at 220 V rated value	1 A
Operating current at 1 current path at DC-13	
• at 24 V rated value	10 A
• at 110 V rated value	1 A
• at 220 V rated value	0.27 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

Short-circuit protection

Design of the fuse link	
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A

Installation/ mounting/ dimensions

Mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Mounting type	screw and snap-on mounting
Height	60 mm
Width	45 mm
Depth	73 mm
Required spacing	
• with side-by-side mounting	
— at the side	0 mm

Connections/Terminals

Type of electrical connection	
• for auxiliary and control current circuit	Cage Clamp terminals
Type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid	2x (0.25 ... 2.5 mm²)
— finely stranded with core end processing	2x (0.25 ... 1.5 mm²)
— finely stranded without core end processing	2x (0.25 ... 2.5 mm²)
• at AWG conductors for auxiliary contacts	2x (24 ... 14)

Safety related data




B10 value	
------------------	--

• with high demand rate acc. to SN 31920	1 000 000; With 0.3 x Ie
Proportion of dangerous failures	
• with low demand rate acc. to SN 31920	40 %
• with high demand rate acc. to SN 31920	75 %
T1 value for proof test interval or service life acc. to IEC 61508	20 y

Certificates/approvals

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
 CCC	 UL	 EG-Konf.
 CSA	 EAC	Type Examination

Test Certificates	Marine / Shipping
Type Test Certificates/Test Report	 ABS
Special Test Certificate	 BUREAU VERITAS
	 LRS
	 PRS

Marine / Shipping	other
 RINA	Miscellaneous
 RMRS	Confirmation
 DNV-GL	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH1140-2BB40>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH1140-2BB40>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RH1140-2BB40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH1140-2BB40&lang=en

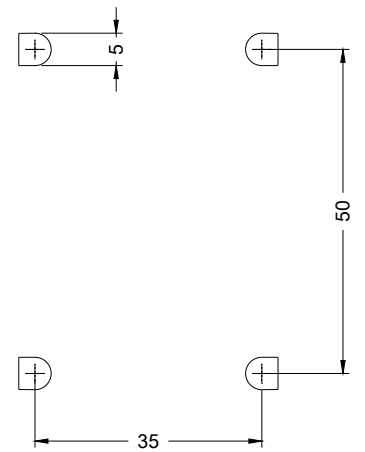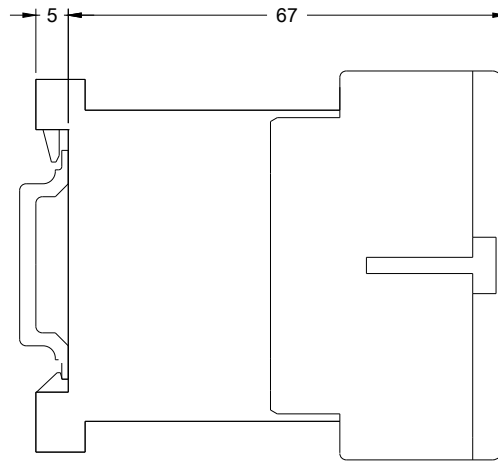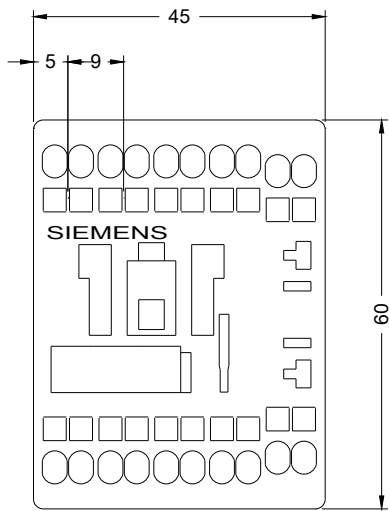

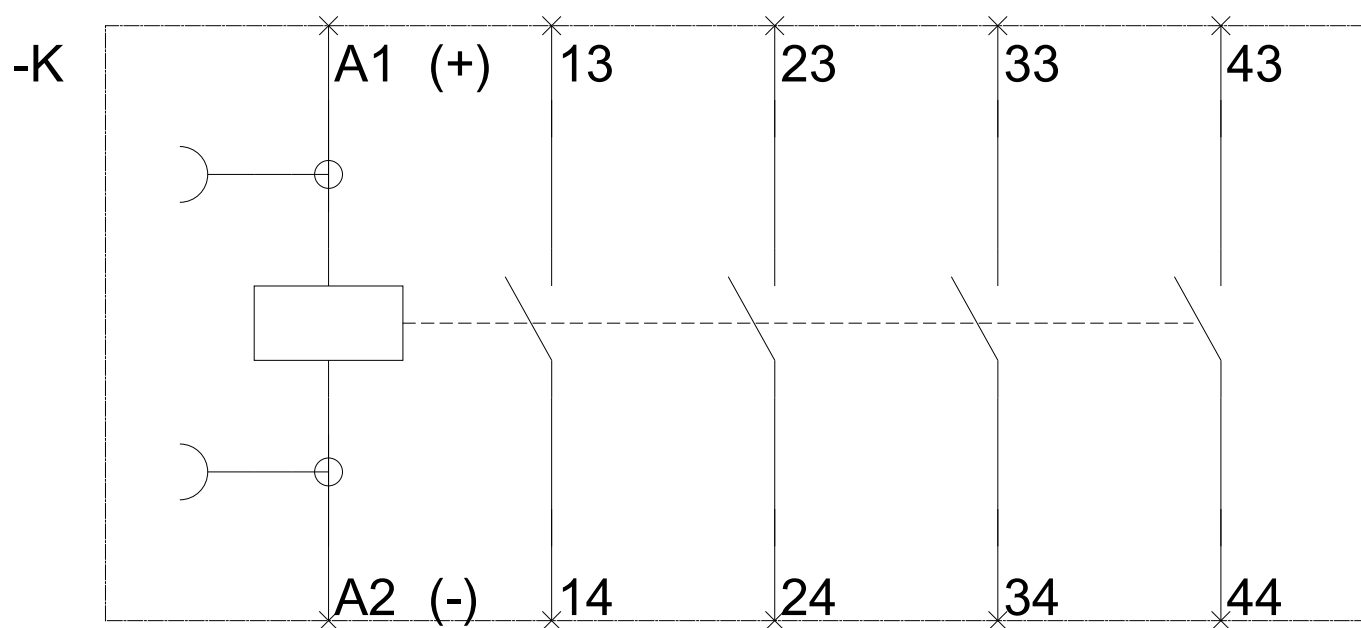

last modified:

10/13/2017