


Synergy® white

socket outlets

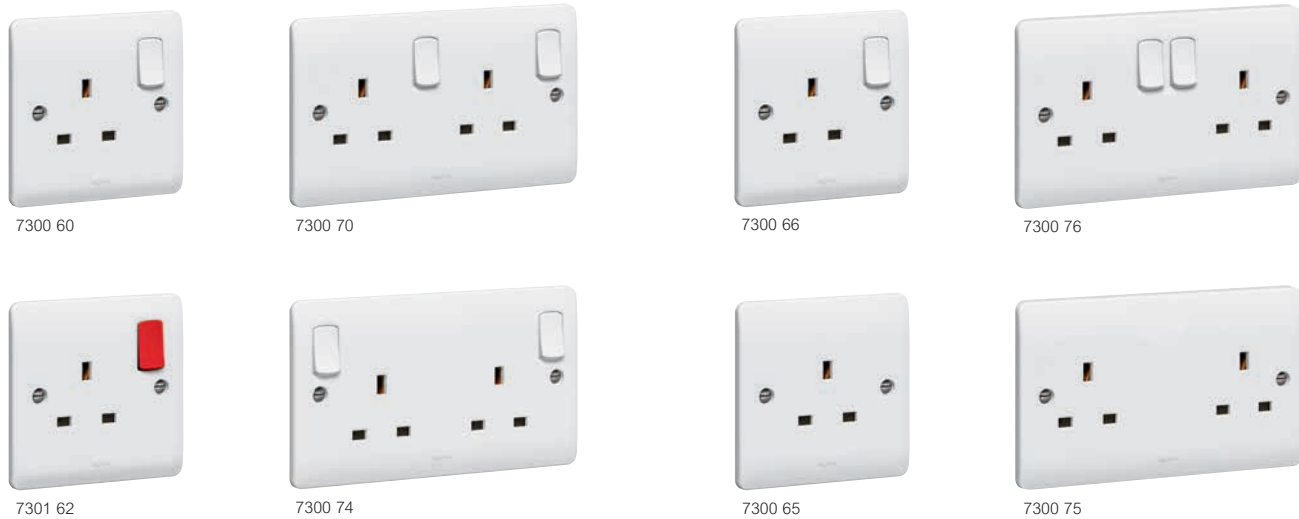


Front plates : white thermoset
Terminal screws captive and backed off ready for cabling
Supplied with optional faceplate screw caps

Pack	Cat. Nos.	Double pole socket outlets 13 A - 250 V~
		Conform to BS 1363 - Part 2 : 1995 Options available as standard with red 'power on' LED indicator Red LED 'power on' upgrade pack also available 2 earth terminals Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
10	7300 60	1 gang – switched
10	7301 62	1 gang – switched with red rocker
10	7300 61	1 gang – switched with red LED power indicator
10	7300 64	1 gang – switched for standard and clean earth applications
10	7300 67	1 gang – switched non-standard earth pin for standard and clean earth applications
5	7300 70	2 gang – switched
5	7301 61	2 gang – switched with red rocker
5	7300 71	2 gang – switched with red LED power indicator
5	7300 74	2 gang – switched outboard for standard and clean earth applications
5	7300 77	2 gang – switched non-standard earth pin for standard and clean earth applications

Pack	Cat. Nos.	Single pole socket outlets 13 A - 250 V~
		Conform to BS 1363 - Part 2 : 1995 Options available as standard with red 'power on' LED indicator Red LED 'power on' upgrade pack also available Conventional earth pin release shutter Single earth terminal Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
10	7300 66	1 gang – switched
5	7300 76	2 gang – switched
		Unswitched and key switched socket outlets 13 A - 250 V~ Conform to BS 1363 - Part 2 : 1995 Optional red LED 'power on' upgrade pack available (not applicable to key switched sockets) 2 earth terminals Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
10	7300 65	1 gang – unswitched
5	7300 75	2 gang – unswitched
1	8200 74	2 gang single socket with DP key switch ¹

1 : Flush mounting back box : min. 35 mm deep

Green locator LED pack or red power indicator pack p. 38

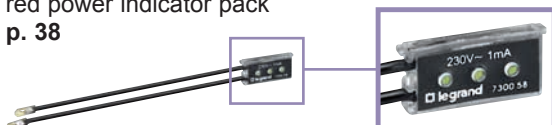

Flush and surface mounting back boxes p. 39



Synergy® white

socket outlets (continued)



7300 90



6781 38



7300 89



7300 69



7300 59

Front plates : white thermoset
Terminal screws captive and backed off ready for cabling
Supplied with faceplate screw caps

Pack	Cat. Nos.	Shaver socket
1	7300 90	<p>Conforms to BS EN 61558-2-5 : 1998 IP 24</p> <p>For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box : min. 47 mm deep Nominal plate dimensions : 146 x 86 mm</p> <p>Supply : 230 V - 50/60 Hz Output : 230/120 V - 20 VA max.</p>

Pack	Cat. Nos.	Socket outlets 15 A - 250 V~
		<p>Conform to BS 546 : 1950 Optional red LED 'power on' upgrade pack available Flush mounting back box : min. 35 mm deep Nominal plate dimensions : 86 x 86 mm</p>
10	7300 88	1 gang – unswitched
10	7300 89	1 gang – switched

Pack	Cat. Nos.	RCD sockets 13 A - 250 V~
		<p>Conform to BS 7288 : 1990 and BS 1363 - Part 2 : 1995 Terminal screws captive and backed off ready for cabling Conventional earth pin release shutter Maximum operating current 16 A Incorporate a "test and reset" button Flush mounting back box : min. 25 mm deep Nominal plate dimensions : - 1 gang 86 x 86 mm - 2 gang 86 x 146 mm</p>
		<p>ELO - DP 30 mA - active - trips in the event of a power failure - suitable in applications where automatic restoration of supply would be hazardous, e.g. machinery, power tools</p>
1	6781 33	RCD unit 1 gang DP 30 mA active
1	6781 37	RCD unit 2 gang DP 30 mA active
		<p>ELR - DP 30 mA - passive - does not trip in the event of a power failure - suitable in applications where automatic restoration of supply is required, e.g. fridge, freezer, unmanned areas</p>
1	6781 34	RCD unit 1 gang DP 30 mA passive
1	6781 38	RCD unit 2 gang DP 30 mA passive

Pack	Cat. Nos.	Socket outlets 5 A - 250 V~
		<p>Conform to BS 546 : 1950 Optional red LED 'power on' upgrade pack available 2 earth terminals Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm</p>
10	7300 68	1 gang – unswitched
10	7300 69	1 gang – switched

Pack	Cat. Nos.	Socket outlet 2 A - 250 V~
		<p>Conforms to BS 546 : 1950 Optional red LED 'power on' upgrade pack available Conventional earth pin shutter release Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm</p>
10	7300 59	1 gang – unswitched

**For switched USB socket outlets
Contact us on +44 (0) 345 605 4333**

Red power indicator LED pack p.38

Flush and surface mounting
back boxes p. 39



Download the full file at

<http://assets.kempstoncontrols.com/doc/Synergy%20Wiring%20Accessories.pdf>



KEMPSTON
CONTROLS