Datasheet



EBC106

Term Tech 6 Way 1 Link Earth Bar 50mm x 6mm Copper M10 Studs 405mm Length



The Termination Technology of Single Link Earth Bars are manufactured to order in house, providing a convenient earthing point for electrical installations requiring an Earthing and Lightning protection system. Assembled with 50mm x 6mm copper mounted on an aluminium base plate using stand off insulators. Standard configuration used of 6x M10 studs before the link and 1x M10 after the link, all spaced at 35mm centres. The disconnection link is used to offer a break in the connection to earth to allow for the testing of an earth rod whilst disconnected from the Lightning protection system.

Technical Data

Colour and Material

Material	Copper
Baseplate Material	Aluminium
Plating Material	None
Application Type, Size and Range	
Bolt Size (mm)	10
Dimensions	
Bar Size (mm)	50x6
Baseplate Width (mm)	89
Bolt Spacings (mm)	35
Product Height (mm)	83
Product Length (mm)	405



W: www.termtech.co.uk
T: 01179 354 900
E: sales@termtech.co.uk

The company with the RIGHT connections at the RIGHT price.

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW







Datasheet



Discernible Features

Mounting Style Surface

Electrical Ratings


Max Current (A) 1000

Product Layout

Workable Ways 7

Number of Links 1

Number of Insulators

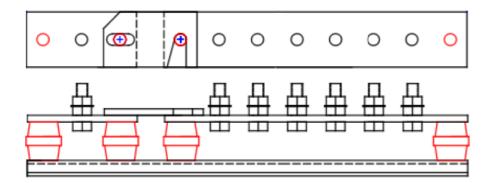



W: www.termtech.co.uk
T: 01179 354 900
E: sales@termtech.co.uk

The company with the RIGHT connections at the RIGHT price.

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road, Bristol BS5 7UW





