

CONFIDENTIAL: THIS DRAWING OR MATERIAL IS SUBMITTED TO YOU WITH THE CONFIDENCE THAT IT WILL BE USED ONLY FOR YOUR INFORMATION ON APPLICATION ENGINEERING STUDIES AND SHALL NEVER BE USED IN ANY MANNER DETRIMENTAL TO OUR INTEREST.

SCALE

2X

UNLESS OTHERWISE SPECIFIED
TOLERANCES TO BE:
DECIMAL $\pm .005$ "
FRACTIONAL $\pm 1/64$ "
ANGULAR $\pm 2^\circ$

DATE

9-5-01

NO.

MDX 1/8-7

TITLE

GLASS TUBE
TIME DELAY FUSE

SUP. NO.

MDX 1/8-7

DATED

3-19-87

DWG.

TCB

CK.

ES

CHANGE

D

ENG.

WC

MFG.

SALES

SBO1319


Bussmann Division
Cooper Industries
St. Louis, MO 63178

DISTRIBUTION

56/A/E/J

CUSTOMER PRINT
FOR
REFERENCE ONLY

PAGE 1 OF 2
© REVISED &
REDRAWN

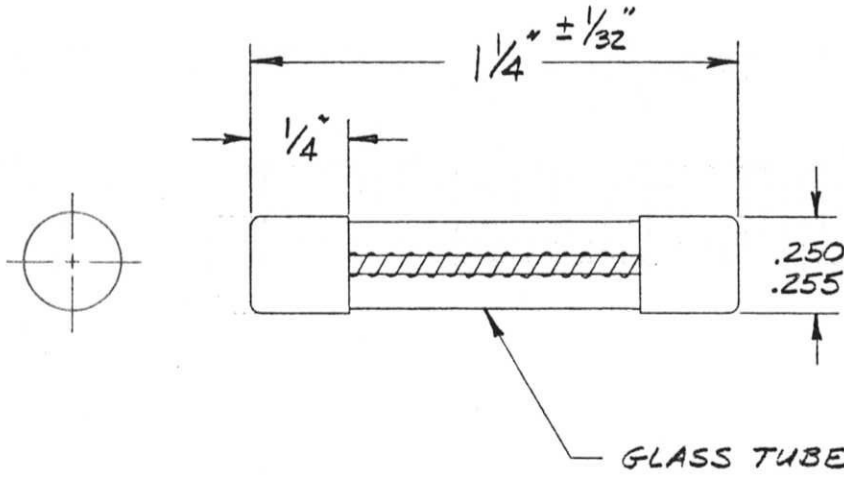

AMPERE	FUSE
1-1/8A,	MDX-1-1/8
1-2/10A,	MDX-1-2/10
1-1/4A,	MDX-1-1/4
1-4-/10A,	MDX-1-4/10
1-1/2A,	MDX-1-1/2
1-6/10A,	MDX-1-6/10
1-8/10A,	MDX-1-8/10
2A,	MDX-2
2-1/4A,	MDX-2-1/4
2-1/2A,	MDX-2-1/2
2-8/10A,	MDX-2-8/10
3A,	MDX-3
3-2/10A,	MDX-3-2/10
3-1/2A,	MDX-3-1/2
4A,	MDX-4
4-1/2A,	MDX-4-1/2
5A,	MDX-5
5-1/4A,	MDX-5-1/4
6A,	MDX-6
6-1/4A,	MDX-6-1/4
7A,	MDX-7

DESIGNED TO :

CARRY 110% OF RATING FOR 4 HOURS
OPEN AT 135% OF RATING WITHIN ONE HOUR.
OPEN AT 200% OF RATING : 1/8 - 3 AMP 5 SECONDS MINIMUM.
3 1/2 - 7 AMP 12 SECONDS MINIMUM.