

Rittal – The System.

Faster – better – everywhere.

Enclosure heater without fan – SK 3105.360

Date : Sep 9, 2020

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Enclosure heater without fan – SK 3105.360

created: 09.09.2020 on www.rittal.com/com-en

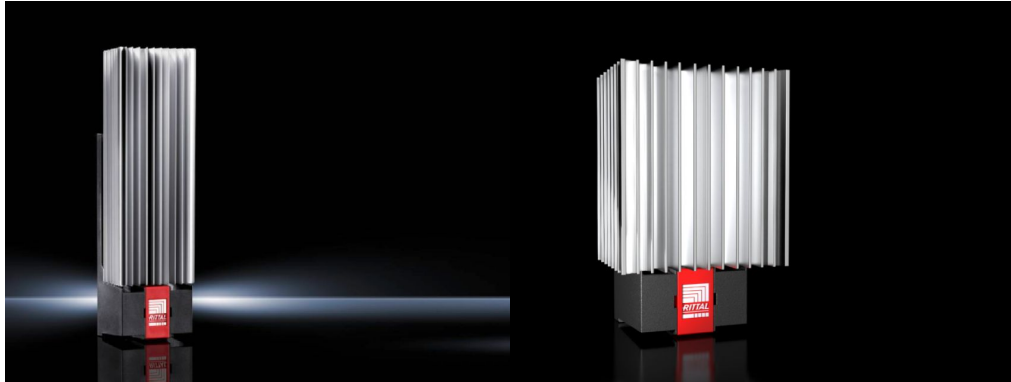

Product description

Description:	Enclosure heaters to regulate relative humidity, prevent temperatures from dropping below the dew point and stop condensation forming inside the enclosure. This prevents consequential damage associated with corrosion or electrical short circuits.
Material:	Aluminium, anodised
Protection category IP to IEC 60 529:	IP 20
Supply includes:	PTC heater Quick-connection terminal Assembly parts
Note:	A thermostat is recommended for precise temperature control inside the enclosure. In order to prevent condensation on assemblies, a hygrostat is recommended to regulate heating In larger enclosures, even heat distribution is best achieved by installing several low-output heaters.

Product features

Continuous thermal output at 10 °C:	86 W - 100 W
Rated operating voltage:	110 V - 240 V, 1~, 50 Hz/60 Hz
Dimensions:	Width: 90 mm Height: 165 mm Depth: 75 mm
Miniature circuit- breaker/fuse:	4 A

eCl@ss 8.0/8.1:	27180710
Packs of:	1 pc(s).
Weight/pack:	0.82 kg
EAN:	4028177638662
Customs tariff number:	85162999
ETIM 7.0:	EC000737
ETIM 6.0:	EC000737
eCl@ss 8.0/8.1:	27180710
eCl@ss 6.0/6.1:	27180710
Product description:	SK enclosure heater, without fan, 86-100 W, 110-240 V, 1~, 50/60 Hz, WHD: 90 x 165 x 75 mm
Approvals	
Approvals:	<div> <div>Approval overview</div> <div>CSA UR + C-UR</div> <div>VDE</div> </div>
Certificates:	EAC
Declarations:	Declaration of conformity